

R2B-...-D

industrial latching relays



Energy
saving

NEW

• Energy-saving double-coil latching relays

- they do not require continuous power supply, but only one pulse to change the state (two stable states: open or closed)

- Relays with permanent magnet, designed for continuous operation*
- For plug-in sockets: on 35 mm rail mount acc. to EN 60715; on panel mounting
- DC coils, insulation class F: 155 °C
- W (mechanical indicator) - standard equipment of relays
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		2 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		10 V
Rated load (capacity)	AC1	12 A / 250 V AC
	AC15	3 A / 120 V 1,5 A / 240 V (B300)
	DC1	12 A / 24 V DC (see Fig. 3)
	DC13	0,22 A / 120 V 0,1 A / 250 V (R300)
Motor load	acc. to UL 508	1/2 HP 240 V AC, 4,9 FLA, single-phase motor ❶
	AC3 acc. to IEC 60947-4-1	0,37 kW 240 V AC, single-phase motor
Min. switching current		5 mA
Max. make current		24 A
Rated current		12 A
Max. breaking capacity	AC1	3 000 VA
Min. breaking capacity		0,3 W
Contact resistance		≤ 100 mΩ
Max. operating frequency	• at rated load AC1 • no load	1 200 cycles/hour 12 000 cycles/hour

Coil data

Rated voltage	DC	5, 6, 12, 24 , 48, 60 V
Operate voltage		≤ 0,8 U _n
Reset voltage (reverse polarity)		min.: 0,8 U _n max.: 1,1 U _n
Control pulse time		min.: 0,05 s max.: 100 s
Rated power consumption	DC	< 3 W

Insulation according to EN 60664-1

Insulation rated voltage		250 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Dielectric strength	• between coil and contacts • contact clearance • pole - pole	2 500 V AC type of insulation: basic 1 000 V AC type of clearance: micro-disconnection 2 500 V AC type of insulation: basic
Contact - coil distance	• clearance • creepage	≥ 2,5 mm ≥ 4 mm

General data


Operating / release time (typical values)		13 ms / 3 ms
Electrical life	• resistive AC1 • cosφ	> 5 x 10 ⁴ 12 A, 250 V AC see Fig. 2
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		28,6 x 21 x 35,5 mm
Weight		35 g
Ambient temperature	• storage (non-condensation and/or icing) • operating	-40...+85 °C -20...+55 °C
Cover protection category		IP 40 EN 60529
Environmental protection		RTI EN 61810-1
Shock resistance	(NO/NC)	10 g / 5 g
Vibration resistance		5 g 10...150 Hz

The data in bold type relate to the standard versions of the relays. *The relays are designed for continuous operation while maintaining the parameters declared in the data sheet. ❶ For single phase motors for 110-120 V AC do not use motors with higher FLA than given for 240 V AC.

09.06.2025


Electrical life at AC resistive load.
Switching frequency: 1 200 cycles/hour

Fig. 1

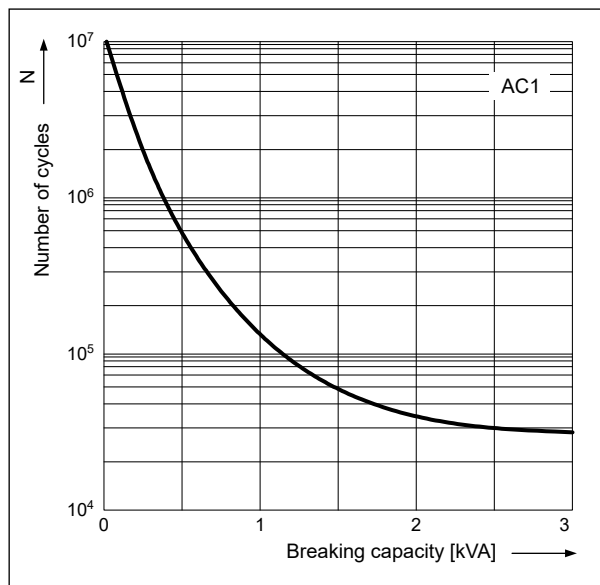


Electrical life reduction factor at AC inductive load

Fig. 2

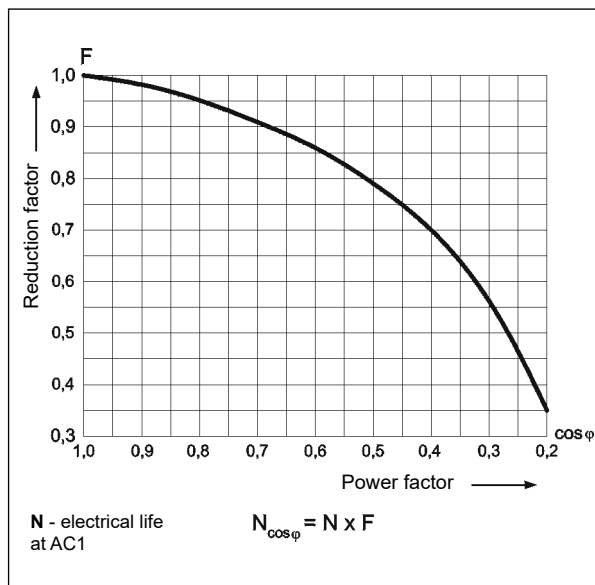


Max. DC resistive load breaking capacity


Fig. 3

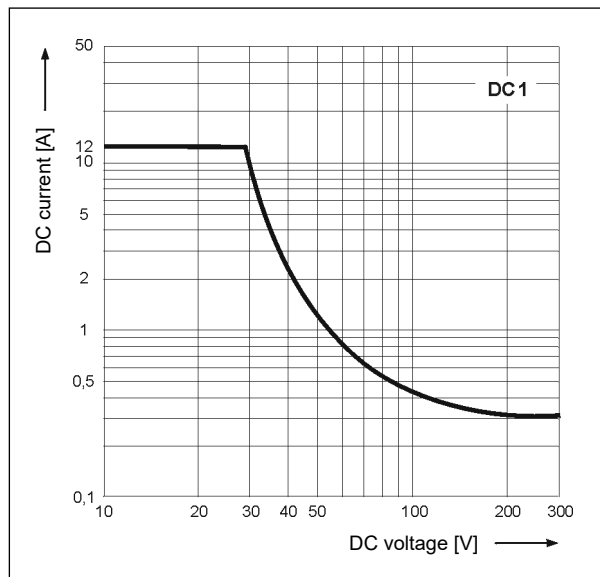

Dimensions - plug-in version

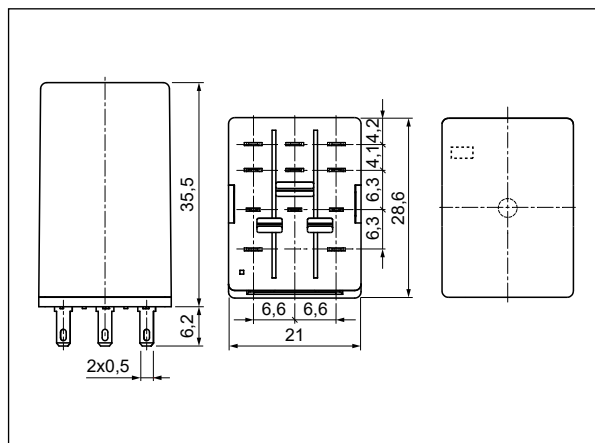

Connection diagram (pin side view)

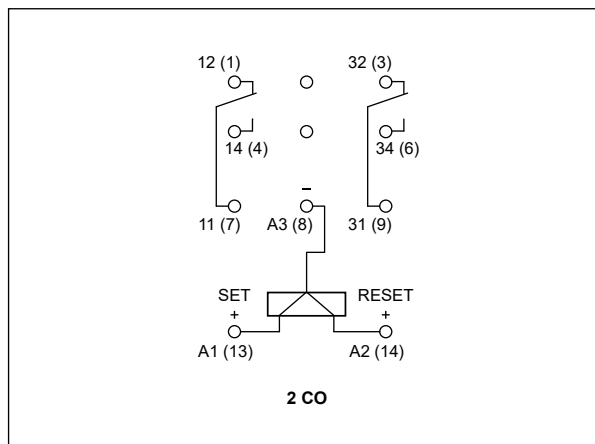

R2B-...-D

industrial latching relays


Mounting, sockets and accessories for relays

Relays **R2B-...-D** are offered in versions for plug-in sockets. **With W equipment as standard** (W - mechanical indicator).

Sockets for R2B-...-D	Accessories			Additional equipment
	Retainer / retractor clips	Spring wire clips	Description plates	
Screw terminals sockets, 35 mm rail mount (acc. to EN 60715) or on panel mounting (two M3 screws)				
GZT3	GZT4-0040, GZP4-0400	G4 1052	GZT4-0035	ZGGZ4 ②
GZM3	GZT4-0040, GZP4-0400	G4 1052	GZT4-0035	ZGGZ4 ②

☉ Interconnection strips ZGGZ4 - see www.relpol.com.pl

Wire connection to relay coils terminals

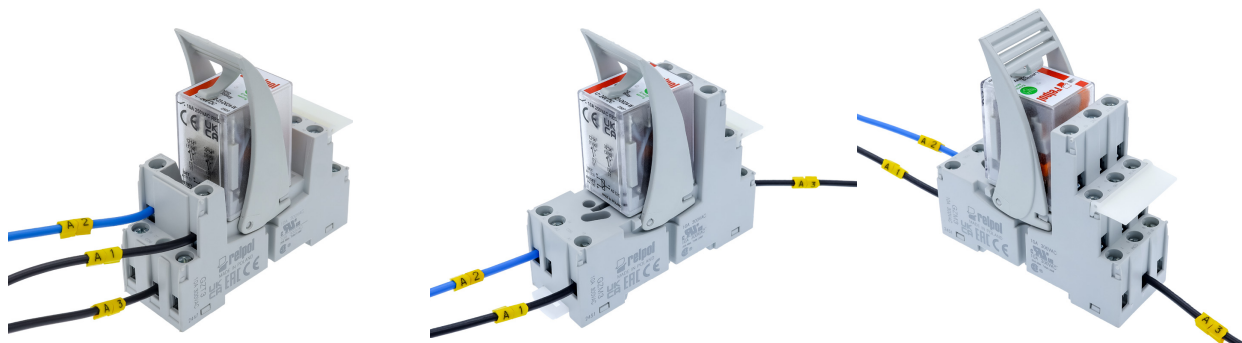


R2B-...-D in socket GZT3

R2B-...-D in socket GZM3

Time courses

Functional description:

- the relay has two coils: SET and RESET. Each is responsible for switching the relay into the appropriate state. The relay maintains the state after the pulse stops.



Control (coils):

- SET (A1+/A3-): a pulse switches the relay to the ON state (R contact closed).
- RESET (A2+/A3-): a pulse switches the relay into the OFF state (R contact open).

Rules of use:

- do not energise both coils simultaneously,
- use short control pulses according to the product data sheet,
- relay retains state after power failure - control of both coils required.


Note

Depending on transport conditions, the relay may change its state – it is recommended to reset it before first use.

R2B-...-D

industrial latching relays

Ordering codes

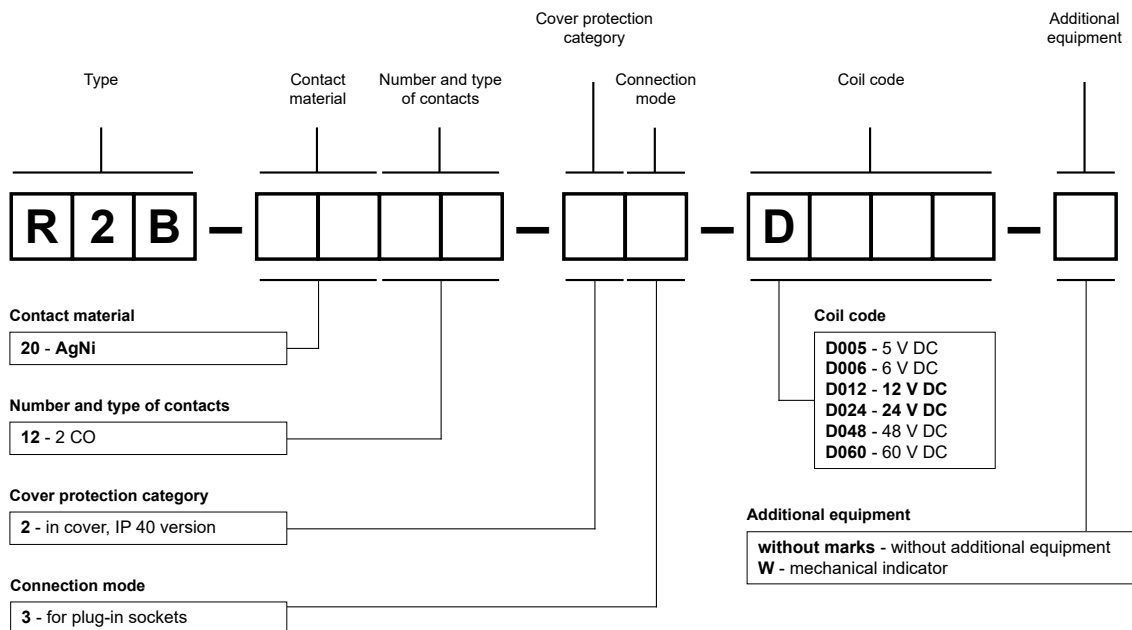

Example of ordering code:

R2B-2012-23-D012-W

latching relay **R2B-...-D** with two coils, for plug-in sockets, two changeover contacts, contact material AgNi, coil voltage 12 V DC, with mechanical indicator, in cover IP 40

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.