



adapter urządzeniowy do SIRIUS wyłącznik wielk. S3, IEC 100 A/690 V, UL 100 A/600 V, AWG4, 25 mm², długość 200 mm, szerokość 72 mm wyjście kabli górą przewód przyspawany maks. 150° 153 mm, do grubości szyn zbiorczych 5 mm i 10 mm, profil TT

Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Adapter urządzenia
wykonanie produktu	Akcesoria
Połączenia	
wykonanie przyłącza elektrycznego	AWG 4
Konstrukcja mechaniczna	
wysokość	200 mm
szerokość adaptera	72 mm
głębokość	55 mm
grubość szyny prądowej	
• minimalny	5 mm
odstęp między środkami szyn	60 mm
Waga netto na jedn.	646 g
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



General Product Approval	Test Certificates
Confirmation	Special Test Certificate
	Miscellaneous
	Type Test Certificates/Test Report

Maritime application	other
	Confirmation
	
	
	
	

other



Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1211-4TR00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/8US1211-4TR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4TR00

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

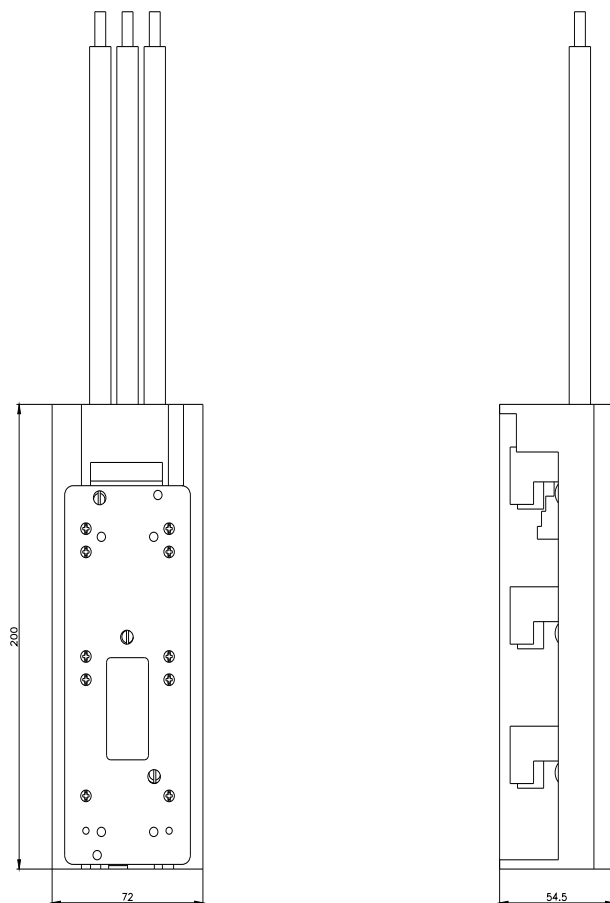

Ostatnia zmiana:

4.12.2025

