

Wtyczka zwierająca do przekazywania energii (400 V) z ET 200pro modułu przełącznika serwisowego lub Rozrusznik silnika do Rozrusznik silnika



Dyrektywa RoHS (dzień/miesiąc/rok)	05/01/2012
Waga netto na jedn.	185 g
Bezpieczeństwo elektryczne	
stopień ochrony IP strona czołowa zgodnie z IEC 60529	IP20
ochrona przed dotykiem od strony czołowej zgodnie z IEC 60529	Ochrona przed dotknięciem palcem

Warunki środowiska	
temperatura otoczenia	
• podczas pracy	55 ... -25 °C
• podczas magazynowania	-40 ... +70 °C

Zezwolenia Certyfikaty		
General Product Approval	EMV	Test Certificates



[Type Test Certificates/Test Report](#)

other	Environment
-------	-------------

[Confirmation](#)



[Environmental Confirmations](#)

Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter

<https://www.siemens.com/ic10>

Industry Mall (System zamawiania online)

<https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RK1922-2BQ00>

CAX-Online-Generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1922-2BQ00>

Service&Support


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1922-2BQ00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1922-2BQ00&lang=en

Krzywe charakterystyczne

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

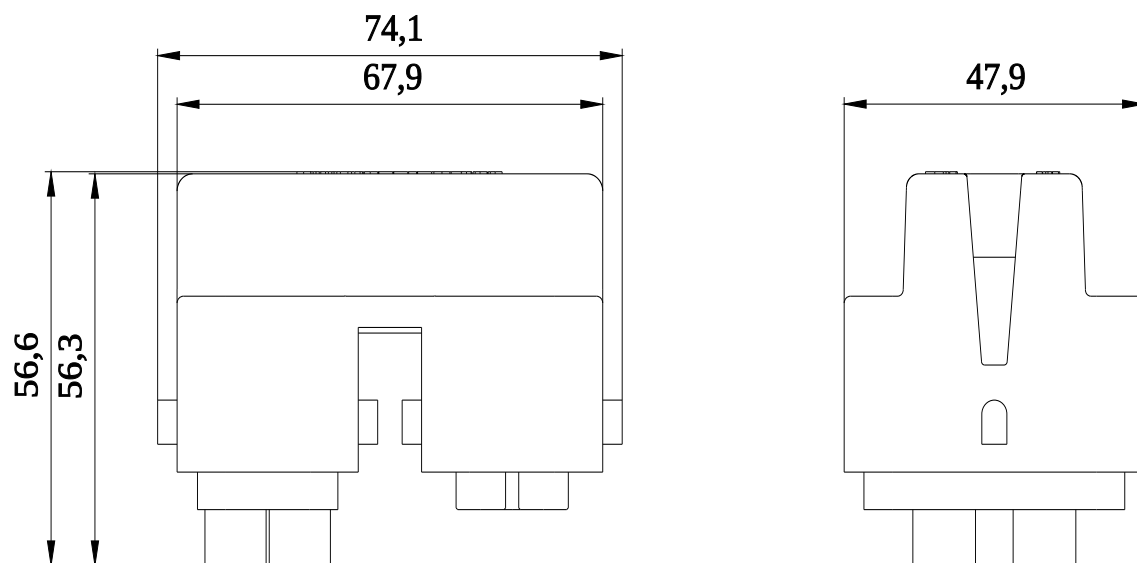

Ostatnia zmiana:

2.04.2025 