


osłona 3VA20 (100 A), 3VA21 (160 A), 3VA22 (250 A), 4-bieg., element wsuwany,
napęd: bezpośredni, napęd silnikowy RCD: brak, wys.: 300 mm szer.: 600 mm

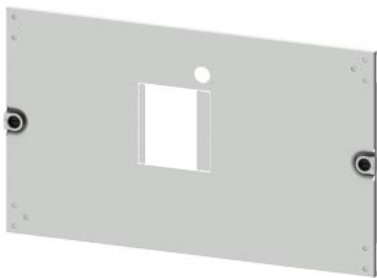

Wersja	
Nazwa markowa produktu	SIVACON S4
oznaczenie produktu	Osłona 3VA
wykonanie powierzchni	powlekany proszkowo
wysokość	300 mm
szerokość	600 mm
głębokość	10 mm
szerokość montażowa dla montażu w szafie rozdzielczej	600 mm
wysokość montażowa dla wyposażenia urządzenia użytkowy	300 mm
Waga netto na jedn.	1,476 kg
materiał	Blacha stalowa
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	UC

Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



General Product Approval	other
--------------------------	-------

[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)



Więcej informacji

Informacje dotyczące opakowania
[Informacje dotyczące opakowania](#)
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8PQ2030-6BA26>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/pl/ps/8PQ2030-6BA26>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8PQ2030-6BA26
CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

Ostatnia zmiana:

11.06.2025 

