


osłona 3VA12 (250 A), 4-bieg., element wsuwany, napęd: bezpośredni, napęd silnikowy RCD: brak, wys.: 300 mm szer.: 600 mm

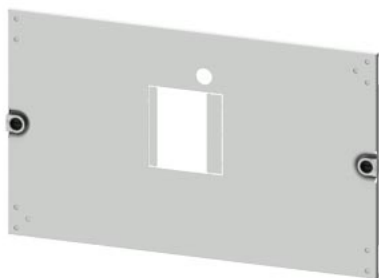

Wersja	
Nazwa markowa produktu	SIVACON S4
oznaczenie produktu	Oslona 3VA
wykonanie powierzchni	powlekany proszkowo
wysokość	300 mm
szerokość	600 mm
głębokość	10 mm
szerokość montażowa dla montażu w szafie rozdzielczej	600 mm
wysokość montażowa dla wyposażenia urządzenia użytkowy	300 mm
Waga netto na jedn.	1,495 kg
materiał	Blacha stalowa
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	UC

Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Conformations](#)



[Environmental Conformations](#)



[Confirmation](#)

General Product Approval	other
--------------------------	-------



[Miscellaneous](#)



[Confirmation](#)

Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8PQ2030-6BA25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/8PQ2030-6BA25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8PQ2030-6BA25

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

Ostatnia zmiana:

11.06.2025 

