


osłona 3VA15 (1000 A), 3VA25 (1000 A), 3VA26 (1250 A), montaż na stałe,
napęd: bezpośredni, RCD: brak, wys.: 450 mm szer.: 800 mm

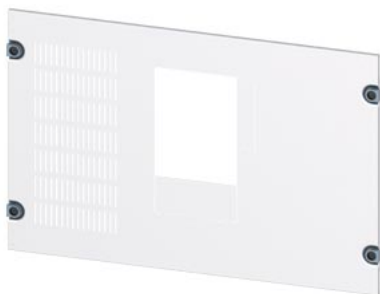

Wersja	
wykonanie powierzchni	powlekany proszkowo
wysokość	450 mm
szerokość	800 mm
głębokość	10 mm
szerokość montażowa dla montażu w szafie rozdzielczej	800 mm
wysokość montażowa dla wyposażenia urządzenia użytkowy	450 mm
Waga netto na jedn.	2,6 kg
materiał	Blacha stalowa
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	UC

Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)



[Environmental Con-
firmations](#)



[Confirmation](#)

General Product Approval

other



[Miscellaneous](#)



[Confirmation](#)



Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8PQ2045-8BA22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/8PQ2045-8BA22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8PQ2045-8BA22

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

Ostatnia zmiana:

15.06.2025 

