



ALPHA 1250 DIN kołnierz wprowadzania kabli do dolnego otworu kołnierзовego w płycie podłogowej, stara wersja z 3 x przełotką gumowa 8HC6900 blacha stalowa IP57 otwór kołnierзовy 186 mm x 198 mm

Wersja	
Nazwa markowa produktu	ALPHA
oznaczenie produktu	Wprowadzenie kabla IP55, SK1
wykonanie produktu	3 x tuleja kablowa
Ogólne dane techniczne	
obróbka powierzchniowa	lakierowany
Konstrukcja mechaniczna	
Waga netto na jedn.	608 g
materiał	Stal
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)



General Product Ap- proval	Test Certificates	other
-------------------------------	-------------------	-------



[Special Test Certi-
ficate](#)

[Confirmation](#)

[Miscellaneous](#)



Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8GK9100-0KK16>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/8GK9100-0KK16>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8GK9100-0KK16


CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

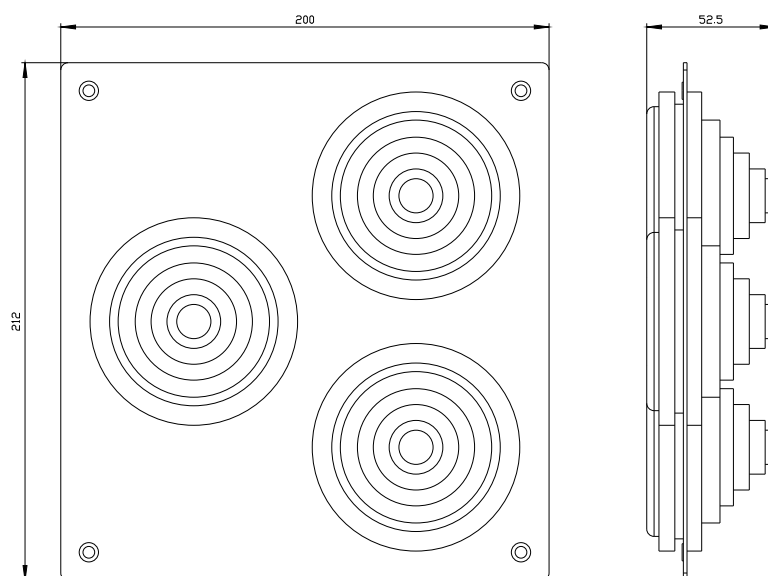

Ostatnia zmiana:

19.05.2025 

