


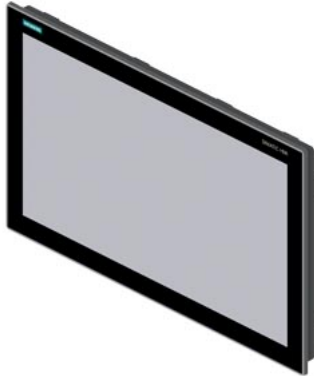

SIMATIC IFP2200 Basic Flat Panel 22" display (16:9) Touch, 1920 x 1080 pixels, standard up to 5 m, for 24V DC, DisplayPort/VGA interface

General information	
Product type designation	IFP2200 Basic
Short designation	Basic Flat Panel 22" Touch
Display	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	21.5 in; 22"
On Screen Display (OSD) configuration	No
Number of colors	16 000 000; 16 million
Resolution (pixels)	
• Image resolution	1 920 x 1 080
• Horizontal image resolution	1 920 pixel
• Vertical image resolution	1 080 pixel
General features	
• Detachable from computer unit	5 m
Backlighting	
• Type of backlighting	LED
• MTBF backlighting (at 25 °C)	30 000 h
• Backlight dimmable	Yes; 0-100 %
Control elements	
Control elements	single-touch screen
Input device	
• Integrated mouse cursor control	No
Touch operation	
• Design as touch screen	Yes; Analog-resistive
Installation type/mounting	
Design	Built-in unit
Front mounting	Yes
VESA mounting	Yes; VESA 100 x 100 integrated
Mounting in portrait format possible	Yes
Mounting in landscape format possible	Yes
Built-in unit	Yes; Portrait mode possible
maximum permitted forward tilt angle from vertical	45°
maximum permitted backward tilt angle from vertical	45°
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Power loss	

Power loss, typ.	24 W		
Power loss, max.	60 W		
Interfaces			
Number of USB interfaces	2; USB 2.0 (downstream)		
USB on the rear	Yes; 2x onboard		
Video interfaces			
• DisplayPort	Yes		
Touch interfaces			
• USB	Yes; USB Type A		
Degree and class of protection			
IP (at the front)	IP65		
Standards, approvals, certificates			
CE mark	Yes		
cULus	Yes; UL 61010-1, UL 61010-2-201		
RCM (formerly C-TICK)	Yes		
KC approval	Yes		
EAC (formerly Gost-R)	Yes		
FCC	Yes		
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C		
• max.	40 °C		
Ambient temperature during storage/transportation			
• min.	-20 °C		
• max.	60 °C		
Relative humidity			
• Operation, max.	85 %		
Vibrations			
• Vibration load in operation	5 m/s²		
• Vibration load during transport/storage	10 m/s²		
Shock testing			
• Shock load during operation	150 m/s²		
• shock acceleration during storage/transport	250 m/s²		
Mechanics/material			
Enclosure material (front)			
• Aluminum	Yes		
Dimensions			
Width of the housing front	540 mm		
Height of housing front	334 mm		
Mounting cutout, width	522.2 mm		
Mounting cutout, height	316.8 mm		
mounting depth	59 mm		
Weights			
Weight (without packaging)	6.5 kg		
Classifications			
		Version	Classification
	eClass	16	19-20-02-01
	eClass	14	19-20-02-01
	eClass	12	19-20-02-01
	eClass	9.1	19-20-02-01
	eClass	9	19-20-02-01
	eClass	8	19-20-02-01
	eClass	7.1	19-20-02-01
	eClass	6	19-20-02-01
	ETIM	10	EC004862
	ETIM	9	EC001428

ETIM	8	EC001428
ETIM	7	EC001428
IDEA	4	6675
UNSPSC	15	43-21-19-02

Approvals / Certificates

General Product Approval

[Manufacturer Declaration](#)


EG-Konf.




UL




RCM

General Product Approval

EMV

[BIS CRS](#)


EG-Konf.




RCM

last modified:

11/20/2024 