



ALPHA 1250 DIN kołnierz wprowadzania kabli do dolnego otworu kołnierzowego w płycie podłogowej, stara wersja z 4 x przelotka gumowa 8HC6900 blacha stalowa IP58 otwór kołnierzowy 186 mm x 198 mm

Wersja	
Nazwa markowa produktu	ALPHA
oznaczenie produktu	Wprowadzenie kabla IP55, SK1
wykonanie produktu	4 x tuleja kablowa
Ogólne dane techniczne	
obróbka powierzchniowa	lakierowany
Konstrukcja mechaniczna	
Waga netto na jedn.	621 g
materiał	Stal
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)



[Confirmation](#)



General Product Ap- proval	Test Certificates	other
-------------------------------	-------------------	-------



[Special Test Certi-
ficate](#)


[Confirmation](#)

[Miscellaneous](#)



Więcej informacji

Informacje dotyczące opakowania
[Informacje dotyczące opakowania](#)
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8GK9100-0KK17>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/pl/ps/8GK9100-0KK17>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8GK9100-0KK17
CAx-Online-Generator
<https://www.siemens.com/cax>
Tender specifications
<https://www.siemens.com/specifications>
Krzywe charakterystyczne

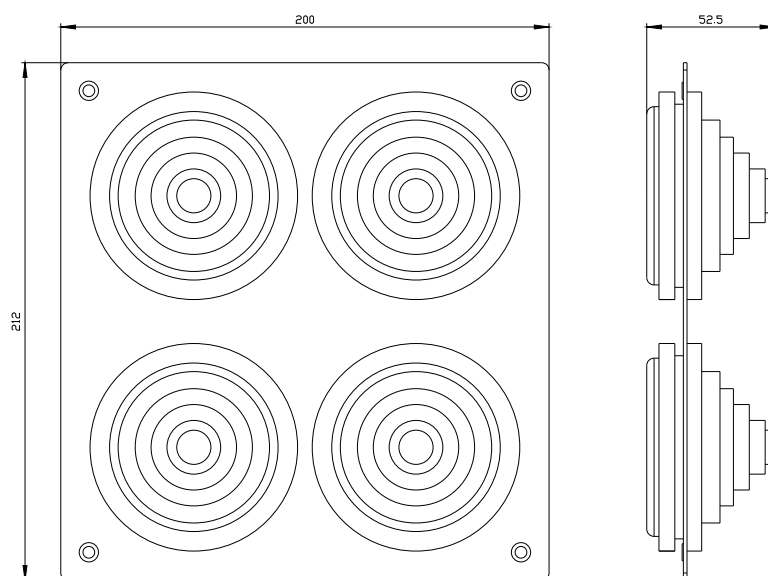

Ostatnia zmiana:

19.05.2025 

