


service set for 12" devices, MP 370 12" Key, TP37, scope of supply: 1 built-in seal, 2 units memory card interlocks wide, 2 units memory card interlocks slim, 10 mounting clips, 6 mounting brackets, 1 plug 2-pole 90 degrees, 1 plug 2-pole 180 degrees, 2 units labeling strip sets, 2 hexagon wrenches

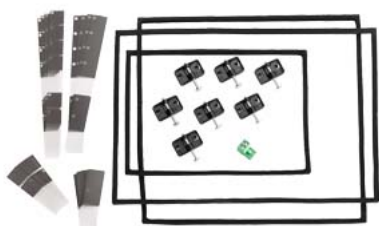

| General information                               |                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product type designation                          | Service set, 12" ... 15"                                                                                                                                                                                                                                                                    |
| Standards, approvals, certificates                |                                                                                                                                                                                                                                                                                             |
| CE mark                                           | Yes                                                                                                                                                                                                                                                                                         |
| Ambient conditions                                |                                                                                                                                                                                                                                                                                             |
| Ambient temperature during operation              |                                                                                                                                                                                                                                                                                             |
| • min.                                            | 0 °C                                                                                                                                                                                                                                                                                        |
| • max.                                            | 55 °C                                                                                                                                                                                                                                                                                       |
| Ambient temperature during storage/transportation |                                                                                                                                                                                                                                                                                             |
| • min.                                            | -20 °C                                                                                                                                                                                                                                                                                      |
| • max.                                            | 70 °C                                                                                                                                                                                                                                                                                       |
| Relative humidity                                 |                                                                                                                                                                                                                                                                                             |
| • Operation, max.                                 | 95 %                                                                                                                                                                                                                                                                                        |
| Mechanics/material                                |                                                                                                                                                                                                                                                                                             |
| Screw type                                        |                                                                                                                                                                                                                                                                                             |
| • Hexagon socket                                  | Yes; 2.5 mm                                                                                                                                                                                                                                                                                 |
| Scope of supply                                   |                                                                                                                                                                                                                                                                                             |
| Delivery quantity in pieces                       |                                                                                                                                                                                                                                                                                             |
| • Parts per unit                                  | 1; Content: 1x mounting gasket sold by the meter, 2x memory card lock wide, 2x memory card lock narrow, 10x mounting clip cast aluminum, 6x mounting bracket, 1x female connector 2-pole 90 degrees, 1x female connector 2-pole 180 degrees, 2x Allen key and labeling strips for Key Panel |
| Other                                             |                                                                                                                                                                                                                                                                                             |
| Merchandise                                       | No                                                                                                                                                                                                                                                                                          |
| Manufacturer name                                 | SIEMENS AG                                                                                                                                                                                                                                                                                  |
| Manufacturer's address                            | Gleiwitzerstraße 555, 90475 Nuremberg, Germany                                                                                                                                                                                                                                              |
| Target devices                                    | For MP370 12" ... 15" Touch/Key and TP37                                                                                                                                                                                                                                                    |

| Classifications |        |         |                |
|-----------------|--------|---------|----------------|
|                 |        | Version | Classification |
|                 | eClass | 16      | 27-33-02-92    |
|                 | eClass | 14      | 27-33-02-92    |
|                 | eClass | 12      | 27-33-02-92    |
|                 | eClass | 9.1     | 27-33-02-92    |
|                 | eClass | 9       | 27-33-02-92    |
|                 | eClass | 8       | 27-24-92-03    |
|                 | eClass | 7.1     | 27-24-92-03    |
|                 | eClass | 6       | 27-24-92-03    |
|                 | ETIM   | 10      | EC002584       |

|        |    |             |
|--------|----|-------------|
| ETIM   | 9  | EC002584    |
| ETIM   | 8  | EC002584    |
| ETIM   | 7  | EC002584    |
| IDEA   | 4  | 3552        |
| UNSPSC | 15 | 32-15-17-03 |

Approvals / Certificates

General Product Approval

[Manufacturer Declaration](#)

Further information

Usable in the following products: Detailed information can be found in the cross-list, which is available for download in the following SIOS note: 40466415  
<https://support.industry.siemens.com/cs/document/40466415/status-of-the-simatic-hmi-accessories-and-cross-list-update?dti=0&lc=en-WW>

last modified: 5/22/2024 