


Przewód AS-i, profilowany żółty, PUR, olejoodporny, 2x 1,5 mm², 100 m składa się ze 100 m przewodu aprobaty do przemysłu stoczniowego



Ogólne dane techniczne		
wykonanie produktu	Profilowane przewody AS-Interface	
napięcie robocze wartość znamionowa	300 V	
Dane mechaniczne		
Promień zgięcia		
• w przypadku przewodu ułożonego na stałe minimalnie dozwolony	12 mm	
• w przypadku ruchomego przewodu minimalnie dozwolony	24 mm	
Aprobata/ Certyfikaty		
General Product Approval	other	Environment

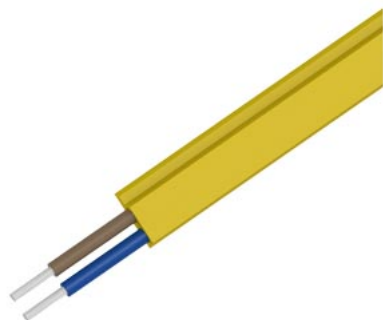

[Confirmation](#)



[Environmental Confirmations](#)

Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter https://www.siemens.com/ic10
Industry Mall (System zamawiania online) https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RX9015-0AA00
CAX-Online-Generator https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9015-0AA00
Service&Support https://support.industry.siemens.com/cs/ww/en/ps/3RX9015-0AA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9015-0AA00&lang=en

Ostatnia zmiana: 19.11.2025