

RCBO DSH201

Data sheet



DSH201 is a 1P+N electromechanical RCBO in 6kA breaking capacity, dedicated for residential applications.

In only two modules width the series offers a complete protection against short-circuits, overload and earth fault currents.

—
01

—
01 DSH201: residual current circuit breaker with overcurrent protection

DSH201 is a 1P+N RCBO compliant to product standard IEC/EN 61009 with the following main technical features:

- Breaking capacity 6 kA
- Type AC, A
- Sensitivity 30 mA
- Tripping characteristics C, B
- Rated current from 6 to 40 A

It is the perfect solution for installation in residential applications.

Application benefits

- Easy cross-wiring and easy installation with PSH busbars.
- Supply possible both from top and bottom side: 25 mm² cage terminals with fail safe feature to avoid improper installation.
- Family feeling in the System pro M compact® range.
- Easy troubleshooting and reduced downtime for maintenance operations thanks to the earth fault indicator: blue flag on the toggle.
- Product Made in Italy, with the indication molded on the side.
RFid tag on the product side to authenticate the product.

RCBO DSH201

Technical data




DSH201

		DSH201			
Standards		IEC/EN 61009-1; IEC/EN 61009-2-1			
Electrical features	Type (wave form of the earth leakage sensed)	AC, A			
	Number of poles	1P + N			
	Rated current I_n	A	$6 \leq I_n \leq 40$		
	Rated sensitivity $I_{\Delta n}$	A	0.03		
	Rated voltage U_e	V	230		
	Insulation voltage U_i	V	500 V AC		
	Overvoltage category	III			
	Pollution degree	2			
	Operating voltage of circuit test U_t	V	170 - 254		
	Rated frequency	Hz	50		
	Rated breaking capacity acc. to IEC/EN 61009-1	I_{cn}	A	6000	
	Rated breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	ultimate I_{cu}	kA	10	
		service I_{cs}	kA	6	
	Rated residual breaking capacity $I_{\Delta m}$ according to EN/IEC 61009-1	A	3000		
	Rated impulse withstand voltage (1.2/50) U_{imp}	kV	4 kV		
	Dielectric test voltage at ind. freq. for 1 min.	kV	2.5 kV (50 / 60Hz, 1 min.)		
Thermomagnetic release characteristic	B: $3 I_n \leq I_n \leq 5 I_n$	■			
	C: $5 I_n \leq I_n \leq 10 I_n$	■			
Energy limiting class acc. to EN 61009-1	3				
Mechanical features	Housing	Insulation group I - II, RAL 7035			
	Toggle	Insulation group II, Black RAL 9005, sealable in ON-OFF positions			
	Earth fault trip indication	Blue flag on toggle			
	Electrical life	operations	10000		
	Mechanical life	operations	20000		
	Protection degree acc. to EN 60529	housing	IP4X		
		terminals	IP2X		
	Shock resistance acc. to IEC/EN 60068-2-27	25 g - 2 shocks - 13 ms			
	Vibration resistance acc. to IEC/EN 60068-2-6	0.1 mm or 1 g - 20 cycles at 5...150...5 Hz			
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	28 cycles with 55 °C/90-96% and 25 °C/95-100%		
	Reference temperature for setting of thermal element	°C	30		
	Ambient temperature (with daily average $\leq +35$ °C)	°C	-25...+55		
	Storage temperature	°C	-40...+70		
Installation	Terminal type	top / bottom	cage terminal with integrated failsafe		
	Terminal size for cables	top / bottom	mm ²	25/25	
	Tightening torque	top / bottom	Nm	2	
	Stripping length of the cable			mm	12.5
	Mounting	on DIN rail EN 60715 (35 mm) by means of mounting clip			
	Mounting position	Any			
	Supply from	Top/Bottom terminals			
Dimensions and weight	Dimensions (H x D x W)	mm	85 x 69 x 35		
	Weight	g	182		


RCBO DSH201

Technical data

Specific let-through energy I^2t DSH201 - Characteristic C

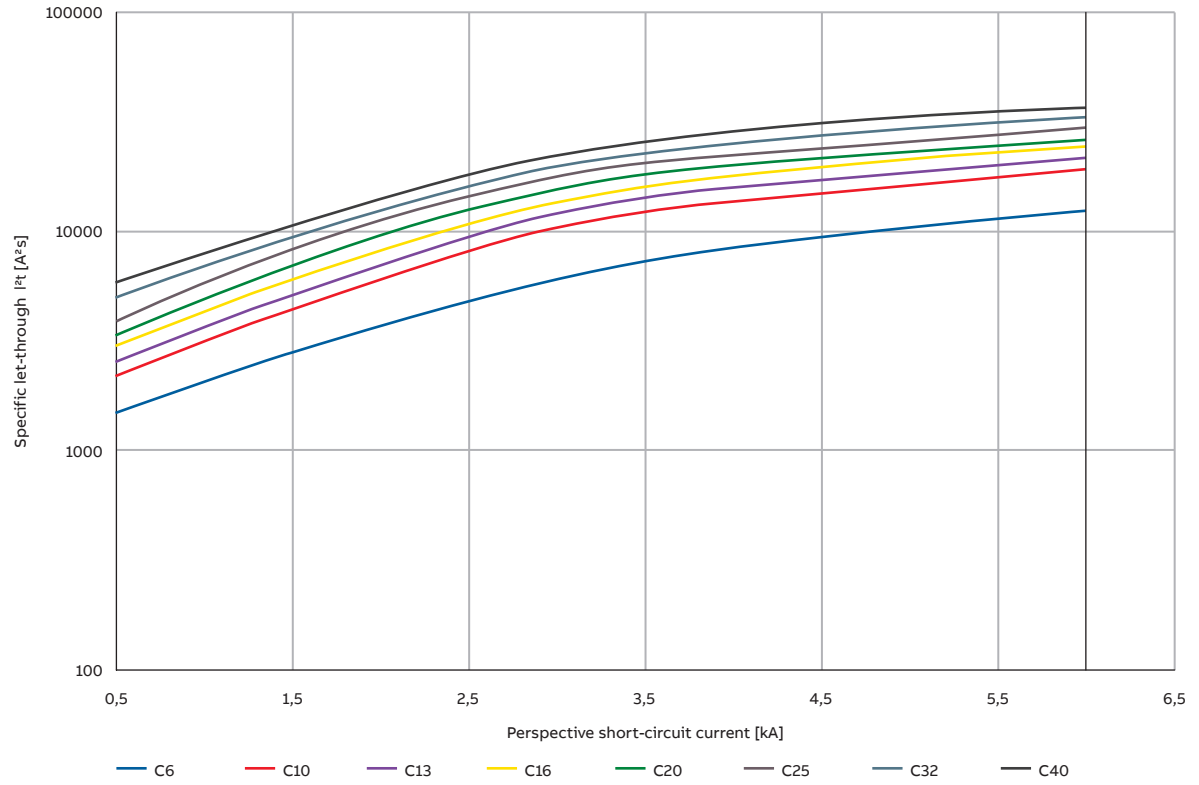


Specific let-through energy I^2t DSH201 - Characteristic B

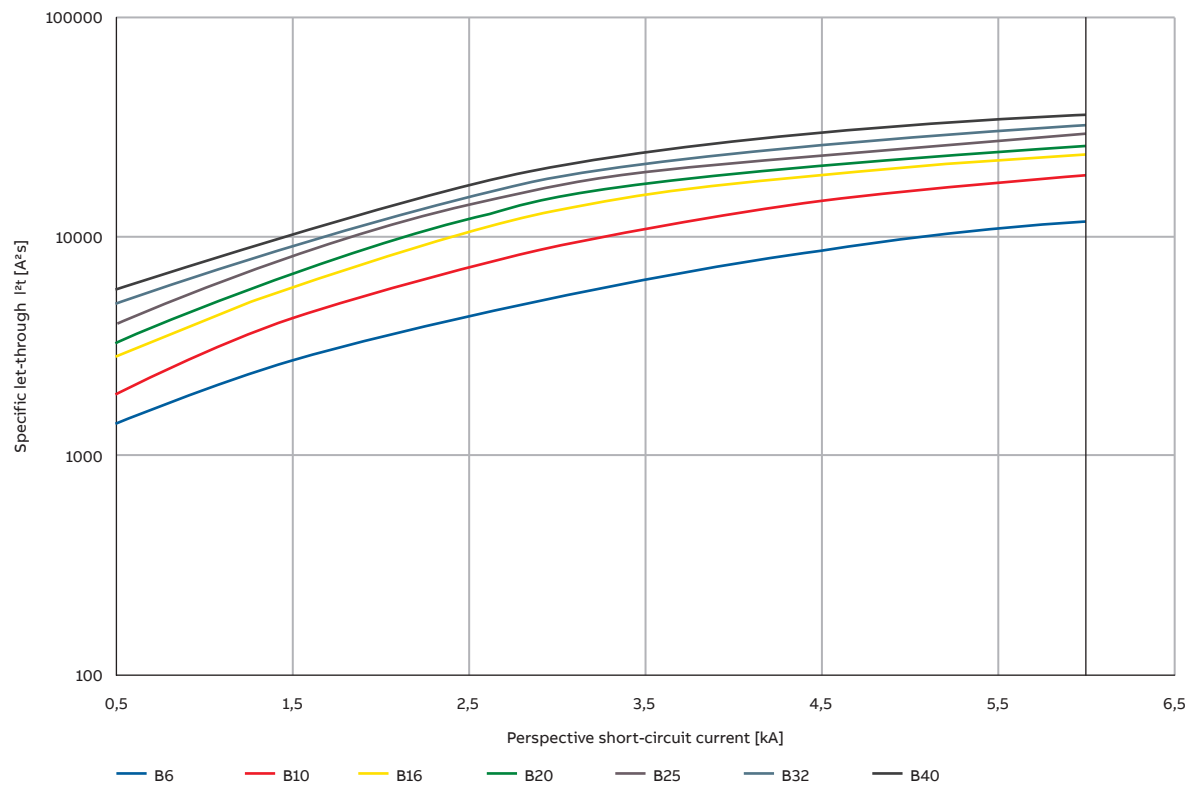


RCBO DSH201
 Technical data

I_{peak} DSH201 - Characteristic C

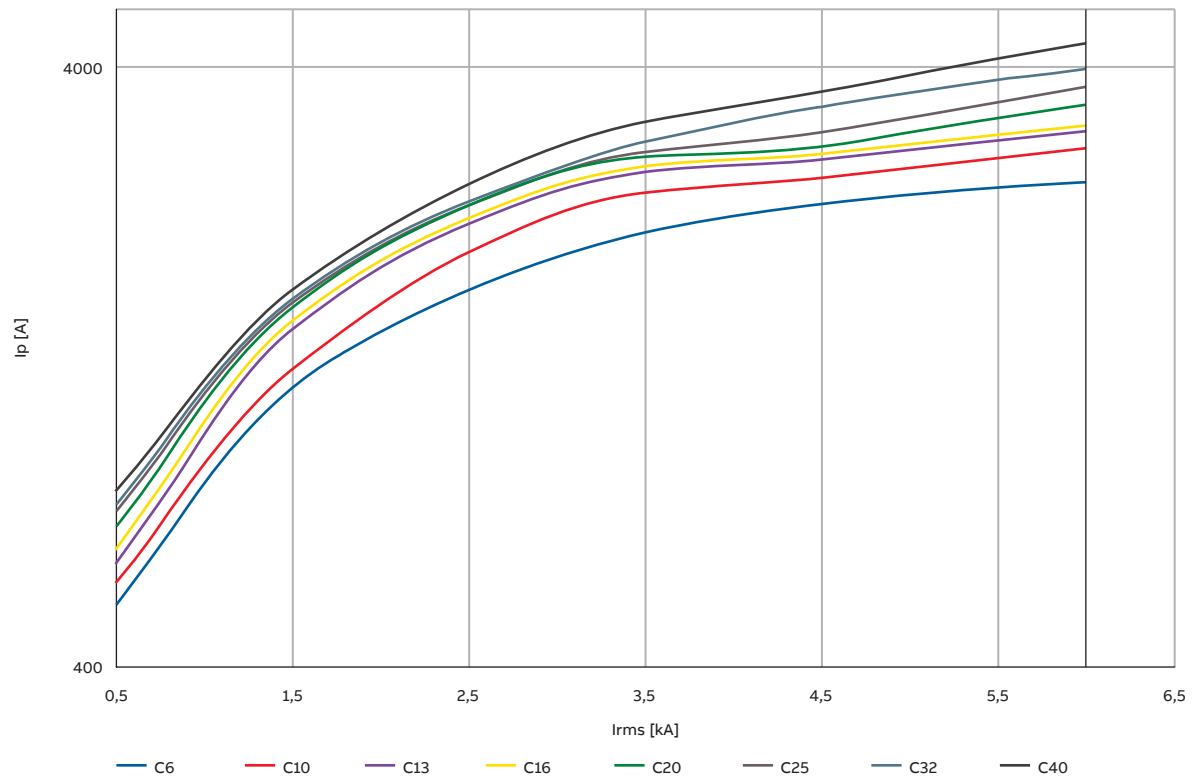


I_{peak} DSH201 - Characteristic B

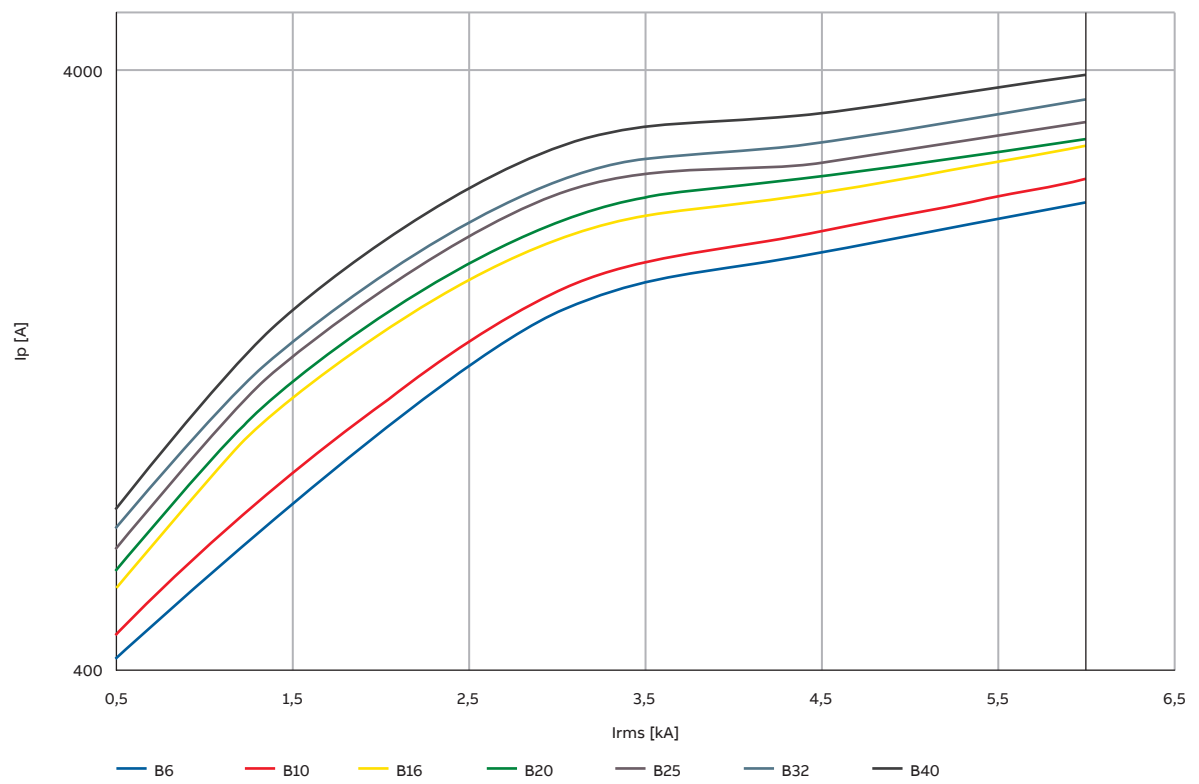


RCBO DSH201
 Technical data

Tripping characteristics B
 IEC/EN 61009-1

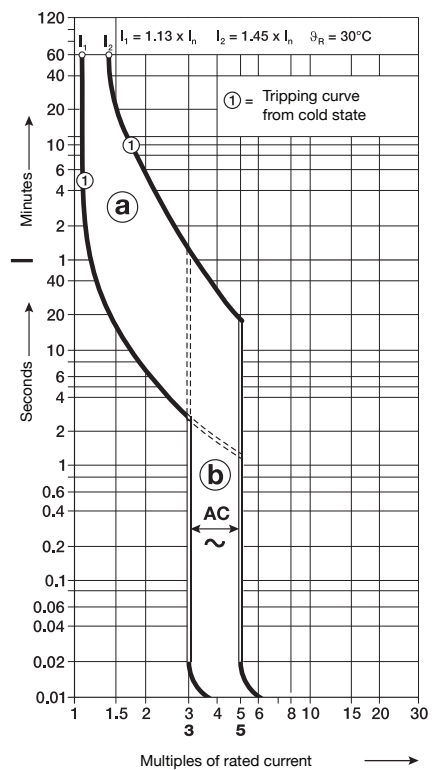

a: thermal trip
 b: electromagnetic trip

Tripping characteristics C
 IEC/EN 61009-1

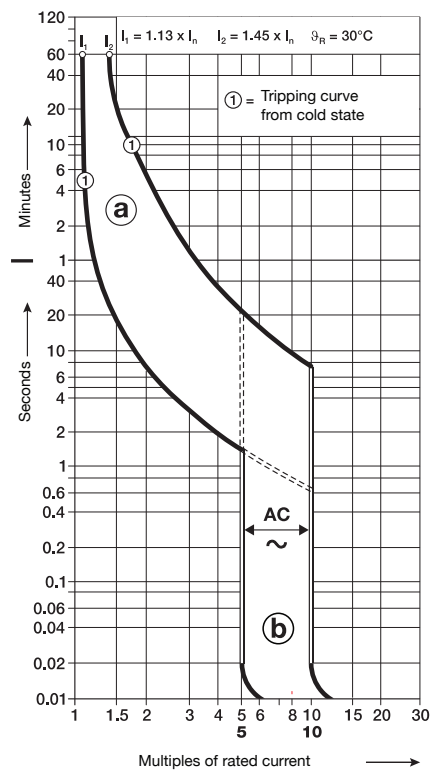

a: thermal trip
 b: electromagnetic trip

RCBO DSH201

Technical data

Performance in altitude

Elevation [m]	2000	3000	4000	5000	6000
Rated Current [A]	1 x I _n	0.96 x I _n	0.94 x I _n	0.92 x I _n	0.90 x I _n
Rated Voltage [V]	1 x U _n	0.877 x U _n	0.775 x U _n	0.676 x U _n	0.588 x U _n

Derating in temperature

Max operating current depending on the ambient temperature (daily average $\leq +35$ °C) of characteristics type B and C.

I _n (A)	Temperature (°C)									
	-25	-20	-10	0	10	20	30	40	50	55
6	8.8	8.4	7.7	7.3	7.0	6.4	6.0	5.5	5.3	5.1
10	13.5	13.0	12.1	11.5	11.0	10.6	10.0	9.4	9.0	8.8
13	16.0	15.6	14.9	14.5	14.0	13.4	13.0	12.4	11.7	11.4
16	19.0	18.6	18.1	17.5	17.0	16.4	16.0	15.3	14.8	14.5
20	24.0	23.5	22.7	22.0	21.4	20.7	20.0	19.1	18.5	18.3
25	27.9	27.5	27.1	26.6	26.0	25.3	25.0	24.3	23.6	23.4
32	36.8	36.2	35.4	34.8	34.0	32.9	32.0	31.3	30.5	30.0
40	44.8	44.6	44.0	43.4	42.1	41.0	40.0	39.0	38.1	37.9

Influence of adjacent devices

Number of devices	1	3	5	7	9
Correction factor	1	0.9	0.85	0.81	0.8

Voltage Drop, power loss, internal resistance, own consumption


I _n (A)	Voltage drop (mV)	Power loss (W)	Int. res. (mΩ)
6	400	2.4	67
10	180	1.8	18
13	200	2.5	15
16	205	3.3	13
20	180	3.6	9
25	220	5.5	9
32	200	6.4	6
40	125	5.0	3

RCBO DSH201

Dimensions and connections

Overall dimensions DSH201

All measurements in mm

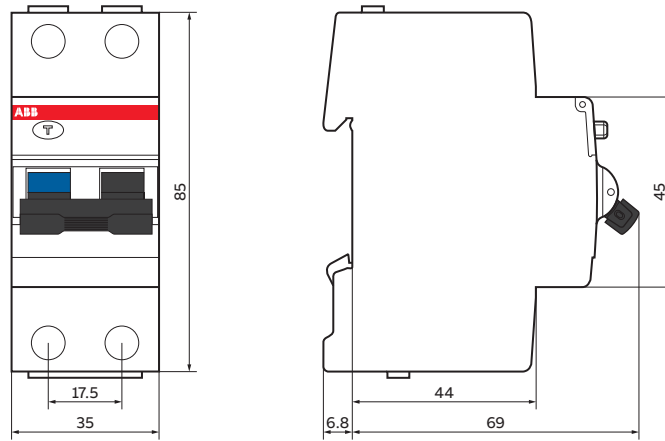

Main connection




ABB S.p.A.
Electrification
Smart Building

www.abb.com/lowvoltage

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG. Copyright © 2019 ABB. All rights reserved.

9AKK107492A1478 - 07.2020