



Covered with Pvc tube

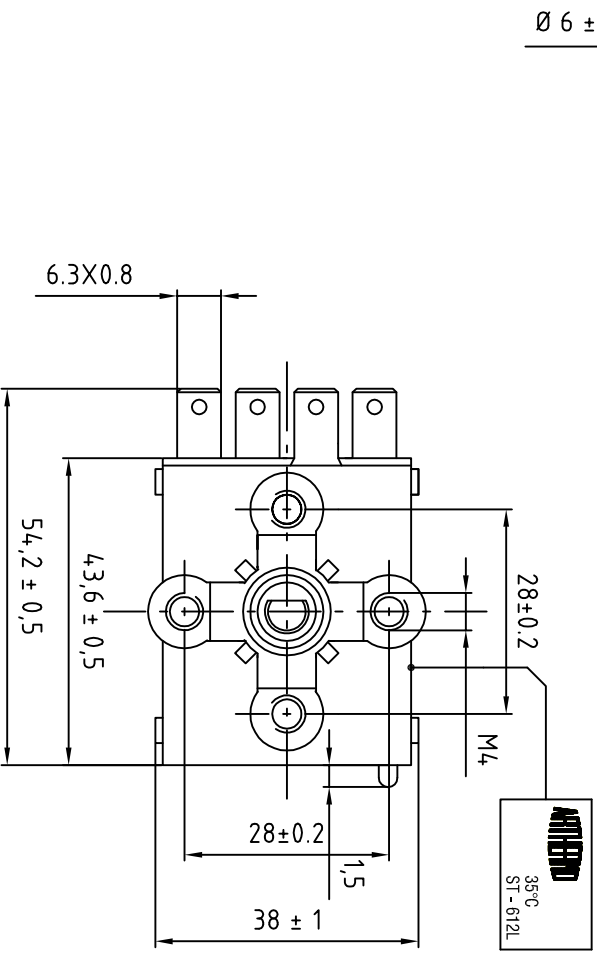

Technical Data

H/OFF :	35°C ± 3°C
L/OFF :	-35°C
BREAKING CAPACITY	C-1 15(2,5)A 400 VAC C-2 2,5(0,4)A 400VAC
MAX °C AROUND THE BODY:	T110°C
MAX °C AROUND THE BULB:	UPPER SWITCHING VALUE +15%
LIFE OF PRODUCTS:	100.000 CYCLES
DIFFERENTIAL:	3 ± 2°C
MINIMUM CURRENT:	200 mA
INSULATION RESISTANCE:	> 100 M OHM
RIF.	35C-556-12L



DESCRIZIONE :
Termostato reg. -35+35°C SP-DT cap:mm 1500 inox steel, faston 6,3 X 0,8

SCALA :	1 : 2	DISEGNATO :	SALA A.	MODIFICA :	DATA :
DATA :	28-10-2003	CONTROLLATO :			
TOLL.GEN. :	+/-0,1				
Descrizione revisione :					Data
Descrizione revisione :					Data
Descrizione revisione :					Data

TERMOSTATO COMPLETO DI ACCESSORI (MANOPOLA - GHIERA E VITI)
COD.C705503001B