


DIN Rail Timers – SH 17

- 7-digit hour meter for DIN rail mounting to EN 50022
- 2 modules wide (36 mm), Count range 99999.99 h

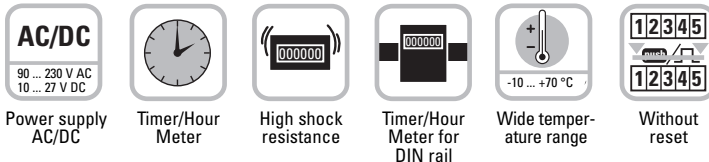

Versatile

- For voltage ranges
10...27 V DC, 230 V AC
- Large temperature range
- Protection to IP 65 on the front side
- 2 modules wide
- Without reset, therefore tamper-proof



Accurate

- Quartz for DC version and 50 Hz for AC version

Simple

- Simple mounting on 35 mm rail to EN 50022
- Snap-on fixing
- 7-digit:
5 digits for hours,
2 decimal positions (0.01 h -> 36 s)


Applications

- General time counting
- Control cabinets
- Small appliances
- Distribution panels
- Plant and equipment etc.

Technical data:

Electrical connection:	screw terminal
Power consumption:	DC: approx. 1 W AC: approx. 2.5 VA
Rated voltages:	230 V AC ±10 %, 50 Hz 10 ... 27 V DC
On time:	100 %
Display:	7 figures (99999.99 h), 0.01 => 36 s
Height of figures:	1.5 x 3.5 mm [0.059 x 0.138"]
Colour of figures:	white on black decimal figures black on white
Reset:	no
Ambient temperature:	-10° ... +70 °C [14 ... 158 °F] at AC (non-condensing) -10° ... +50 °C [14 ... 122 °F] at DC
Mounting position:	any
Protection:	IP 65 front side screw terminal IP 20
Housing:	plastic; colour Ral 7035
Weight:	approx. 60 g [2.116 oz]
Colour of housing:	grey

Dimensions:

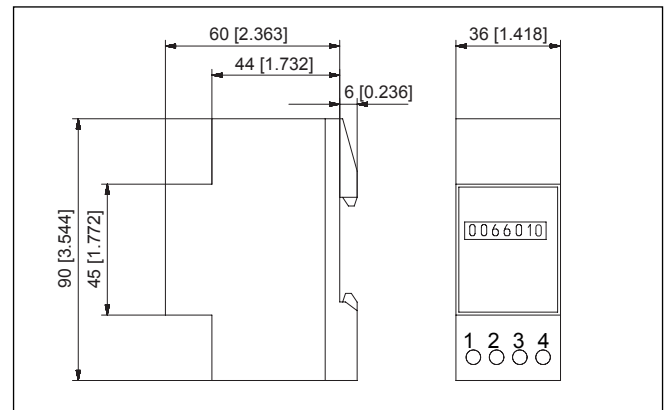

Connection

DC:	2 = + 3 = - 1,4 = n.c.	AC:	2 and 3 1,4 = n.c.
-----	------------------------------	-----	-----------------------

Order code:

Voltage	10 ... 27 V DC	230 V AC
Art. No.	0.170.000.351*	0.170.000.075*

*standard stock model