



Circuit breaker size S00 for motor protection, CLASS 10 A-release 5.5...8 A N-release 104 A Spring-type terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

|   |                      |
|---|----------------------|
| product brand name  | SIRIUS               |
| product designation   | Circuit breaker      |
| design of the product   | For motor protection |
| product type designation  | 3RV2                 |
| <b>General technical data</b>   |                      |
| size of the circuit-breaker   | S00                  |
| size of contactor can be combined company-specific                                  | S00, S0              |
| product extension auxiliary switch  | Yes                  |
| power loss [W] for rated value of the current                                       |                      |
| • at AC in hot operating state  | 9.25 W               |
| • at AC in hot operating state per pole   | 3.1 W                |
| insulation voltage with degree of pollution 3 at AC rated value                     | 690 V                |
| surge voltage resistance rated value  | 6 kV                 |
| shock resistance according to IEC 60068-2-27  | 25g / 11 ms          |
| mechanical service life (operating cycles)  |                      |
| • of the main contacts typical  | 100 000              |
| • of auxiliary contacts typical   | 100 000              |
| electrical endurance (operating cycles) typical                                     | 100 000              |
| type of protection according to ATEX directive 2014/34/EU                           | Ex II (2) GD         |
| certificate of suitability according to ATEX directive 2014/34/EU                   | DMT 02 ATEX F 001    |
| reference code according to IEC 81346-2   | Q                    |
| Substance Prohibitance (Date)   | 10/01/2009           |
| SVHC substance name   | Blei - 7439-92-1     |
| <b>Ambient conditions</b>   |                      |
| installation altitude at height above sea level maximum                             | 2 000 m              |
| ambient temperature   |                      |
| • during operation  | -20 ... +60 °C       |
| • during storage  | -50 ... +80 °C       |
| • during transport  | -50 ... +80 °C       |
| relative humidity during operation  | 10 ... 95 %          |
| <b>Main circuit</b>   |                      |
| number of poles for main current circuit  | 3                    |
| adjustable current response value current of the current-dependent overload release | 5.5 ... 8 A          |
| operating voltage   |                      |
| • rated value   | 20 ... 690 V         |
| • at AC-3 rated value maximum   | 690 V                |
| • at AC-3e rated value maximum  | 690 V                |
| operating frequency rated value   | 50 ... 60 Hz         |
| operational current rated value   | 8 A                  |

|   |  |
|---|--|
| <b>operational current</b>  |  |
| <ul style="list-style-type: none"> <li>● at AC-3 at 400 V rated value</li> <li>● at AC-3e at 400 V rated value</li> </ul>   | 8 A<br>8 A   |
| <b>operating power</b>  |  |
| <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 1.5 kW<br>3 kW<br>4 kW<br>5.5 kW<br>1.5 kW<br>3 kW<br>4 kW<br>5.5 kW |
| <b>operating frequency</b>  |  |
| <ul style="list-style-type: none"> <li>● at AC-3 maximum</li> <li>● at AC-3e maximum</li> </ul>   | 15 1/h<br>15 1/h   |
| <b>Auxiliary circuit</b>  |  |
| <b>design of the auxiliary switch</b>   | transverse   |
| <b>number of NC contacts for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>●</li> </ul>   | 1  |
| number of NO contacts for auxiliary contacts  |  |
| <ul style="list-style-type: none"> <li>●</li> </ul>   | 1  |
| number of CO contacts for auxiliary contacts  | 0  |
| <b>operational current of auxiliary contacts at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>● at 24 V</li> <li>● at 120 V</li> <li>● at 125 V</li> <li>● at 230 V</li> </ul>   | 2 A<br>0.5 A<br>0.5 A<br>0.5 A                                       |
| <b>operational current of auxiliary contacts at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>● at 24 V</li> <li>● at 60 V</li> </ul>  | 1 A<br>0.15 A  |
| <b>Protective and monitoring functions</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>● ground fault detection</li> <li>● phase failure detection</li> </ul>   | No<br>Yes  |
| <b>trip class</b>   | CLASS 10   |
| <b>design of the overload release</b>   | thermal  |
| <b>maximum short-circuit current breaking capacity (Icu)</b>  |  |
| <ul style="list-style-type: none"> <li>● at AC at 240 V rated value</li> <li>● at AC at 400 V rated value</li> <li>● at AC at 500 V rated value</li> <li>● at AC at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>42 kA<br>6 kA                                    |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>  |  |
| <ul style="list-style-type: none"> <li>● at 240 V rated value</li> <li>● at 400 V rated value</li> <li>● at 500 V rated value</li> <li>● at 690 V rated value</li> </ul>  | 100 kA<br>100 kA<br>42 kA<br>4 kA                                    |
| response value current of instantaneous short-circuit trip unit   | 104 A  |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>● at 480 V rated value</li> <li>● at 600 V rated value</li> </ul>  | 8 A<br>8 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>● for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>● for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> </ul> </li> </ul>   | 0.33 hp<br>1 hp<br>2 hp<br>2 hp                                      |

|   |  |   |
|---|--|---|
| — at 460/480 V rated value  | 5 hp   |   |
| — at 575/600 V rated value  | 5 hp   |   |
| <b>contact rating of auxiliary contacts according to UL</b>   | C300 / R300  |   |
| <b>Short-circuit protection</b>   |  |   |
| <b>product function short circuit protection</b>  | Yes  |   |
| <b>design of the short-circuit trip</b>   | magnetic   |   |
| <b>design of the fuse link</b>  | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current I <sub>k</sub> < 400 A)   |   |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>   |  |   |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>  | gL/gG 50 A<br>gL/gG 40 A<br>gL/gG 35 A   |   |
| <ul style="list-style-type: none"> <li>• at 400 V</li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• at 500 V</li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• at 690 V</li> </ul>  |  |   |
| <b>Installation/ mounting/ dimensions</b>   |  |   |
| <b>mounting position</b>  | any  |   |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |   |
| <b>height</b>   | 106 mm   |   |
| <b>width</b>  | 45 mm  |   |
| <b>depth</b>  | 97 mm  |   |
| <b>required spacing</b>   | 0 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>30 mm<br>30 mm<br>9 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm<br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm |   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>  |  |   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul>                       |  |   |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul>                           |  |   |
| <b>Connections/ Terminals</b>   |  |   |
| <b>type of electrical connection</b>  |  | spring-loaded terminals<br>spring-loaded terminals  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>   |  |   |
| <b>arrangement of electrical connectors for main current circuit</b>  |  | Top and bottom  |
| <b>type of connectable conductor cross-sections</b>   |  | 2x (0.5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> </ul> |  |   |

|   |                                   |
|---|-----------------------------------|
| • for AWG cables for main contacts                  | 2x (20 ... 12)                    |
| <b>type of connectable conductor cross-sections</b> |                                   |
| • for auxiliary contacts                            |                                   |
| — solid or stranded                                 | 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| — finely stranded with core end processing          | 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| — finely stranded without core end processing       | 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| • for AWG cables for auxiliary contacts             | 2x (20 ... 14)                    |
| <b>design of screwdriver shaft</b>                  | Diameter 3 mm                     |
| <b>size of the screwdriver tip</b>                  | 3,0 x 0,5 mm                      |

#### Safety related data

|  |        |
|--|--------|
| <b>proportion of dangerous failures</b>                              |        |
| • with low demand rate according to SN 31920                         | 50 %   |
| • with high demand rate according to SN 31920                        | 50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT |
| IEC 61508  |        |
| <b>T1 value</b>  |        |
| • for proof test interval or service life according to IEC 61508     | 10 a   |

#### Electrical Safety

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |
| display version for switching status                           | Handle   |

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



[KC](#)

|                          |                                |                   |                   |
|--------------------------|--------------------------------|-------------------|-------------------|
| General Product Approval | For use in hazardous locations | Test Certificates | Marine / Shipping |
|--------------------------|--------------------------------|-------------------|-------------------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Miscellaneous](#)

|       |         |             |
|-------|---------|-------------|
| other | Railway | Environment |
|-------|---------|-------------|

[Confirmation](#)



[Confirmation](#)



#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1HA25>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1HA25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1HA25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2011-1HA25&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1HA25&lang=en)



Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1HA25/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1HA25&objecttype=14&gridview=view1>

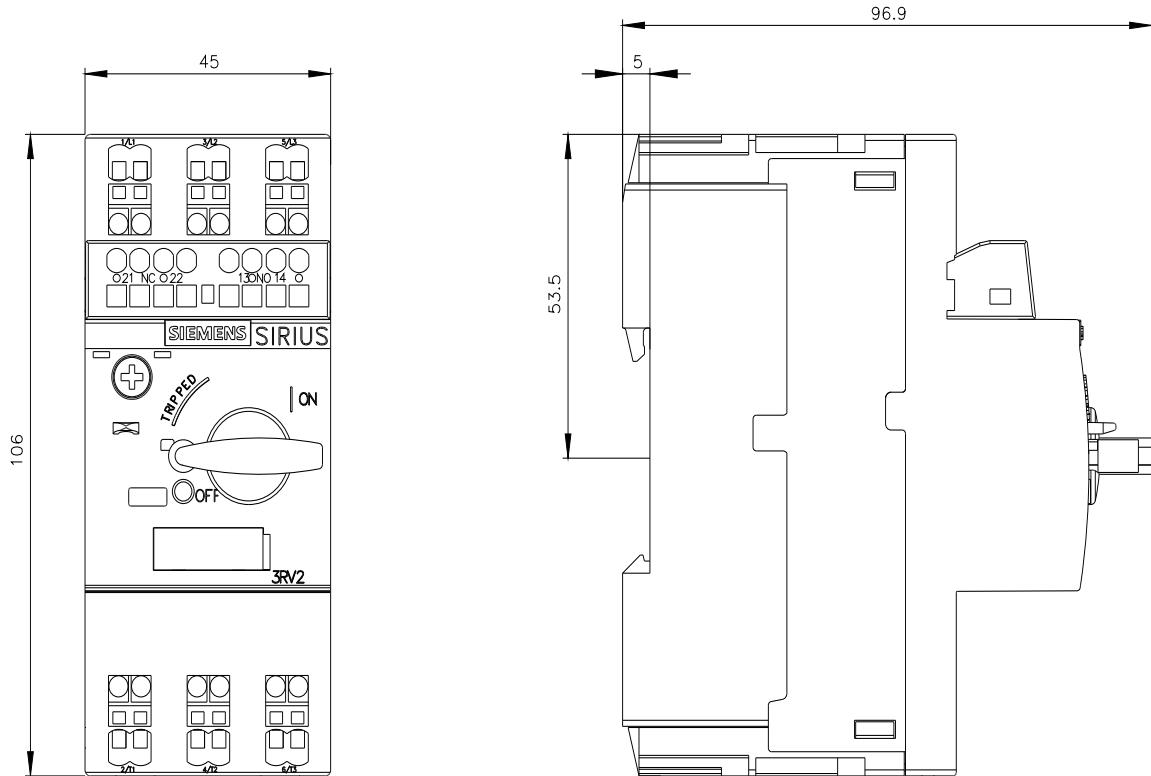

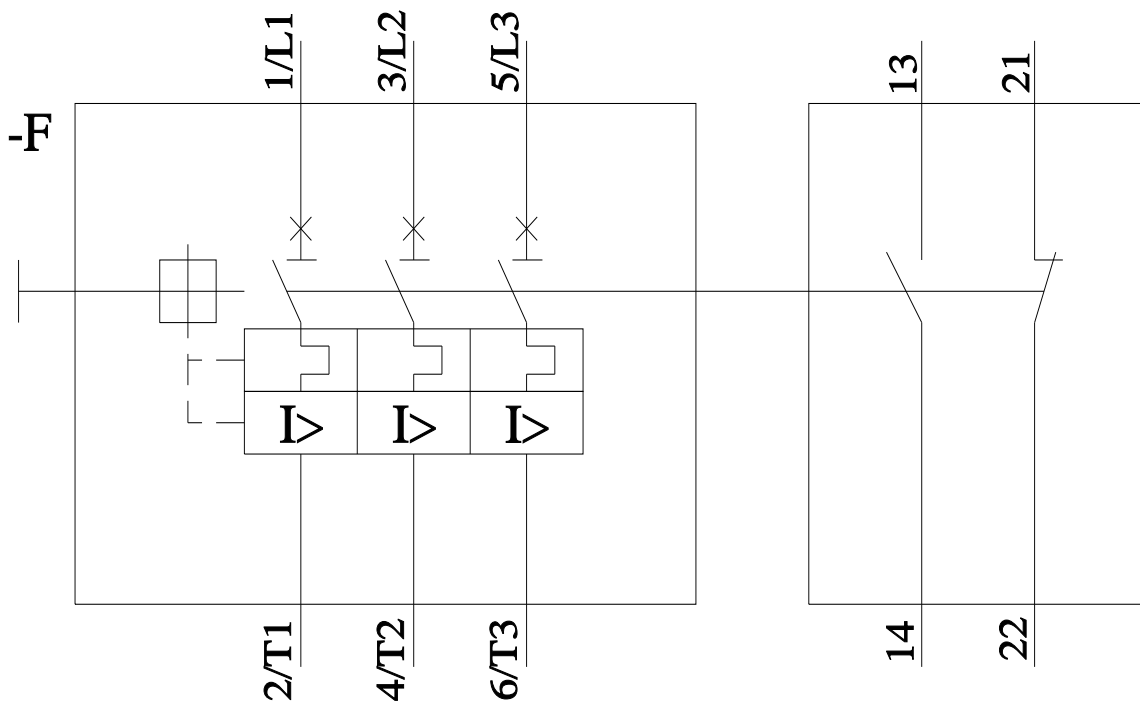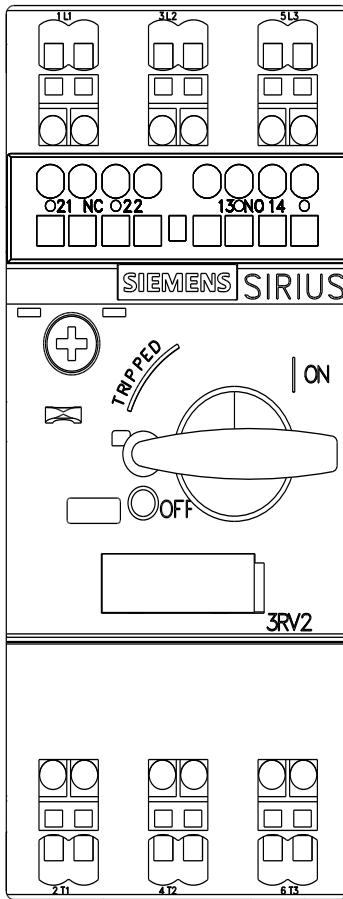

last modified:

8/29/2023