


Product Environmental Profile

Easy Switched Rack Power Distribution Units (PDUs)



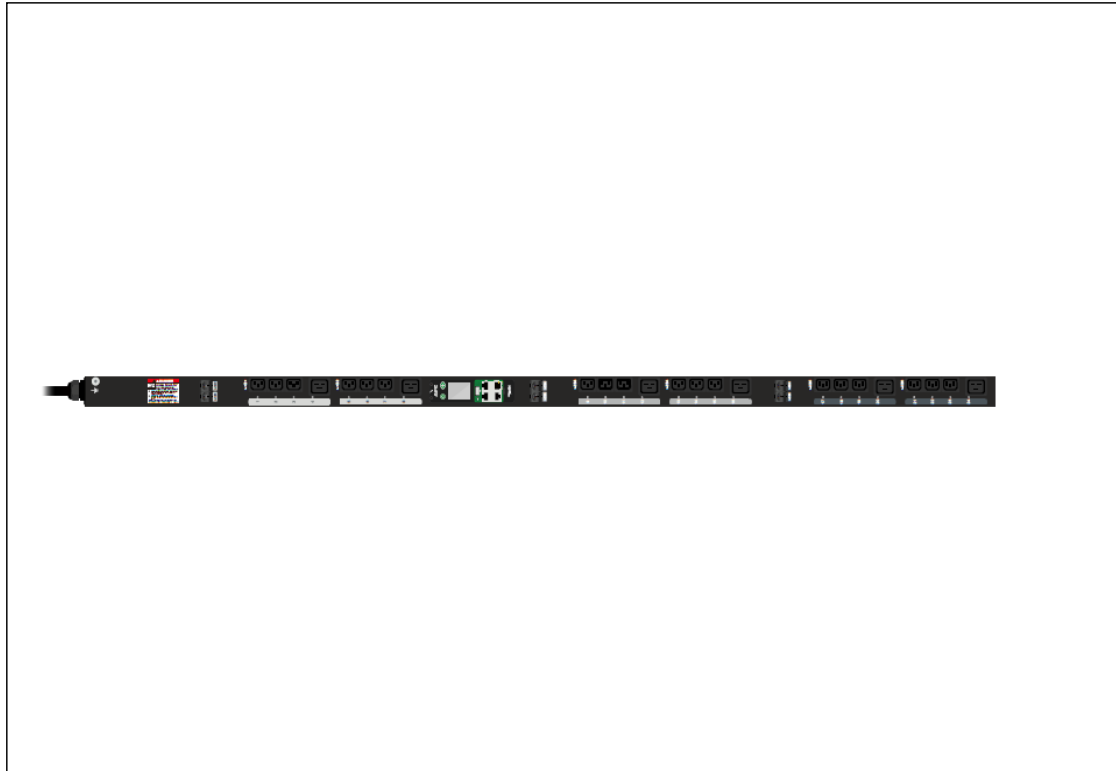


General information

Reference product	Easy PDU, 2G, Metered-by-Outlet with Switching, ZeroU, 22kW, 230V, (18) C13 & (6) C19 - EPDU2232SMBO
Description of the product	EasyPDU provides reliable rack power distribution units that offer more than a power strip for server rack and network rack solutions.
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology. The products of the range are: Easy Switched Rack Power Distribution Units (PDUs) EPDU2232SMBO EPDU2116MBO EPDU2132MBO EPDU2216MBO EPDU2232MBO EPDU2116SMBO EPDU2132SMBO EPDU2216SMBO EPDU2296SMBOX101 EPDU2296SMBOX100 EPDU2232SMBOX100 EPDU2263SMBOX100 EPDU2263SMBOX101 EPDU2296MX100 EPDU2296MX101 EPDU2263MX100 EPDU2263MX101 EPDU2232MX100 EPDU2296SMBOX200
Functional unit	To provide rack power distribution via a IEC60309 3P+N+PE inlet with 18 C13 and 6 C19 outlets and distributes power up to 3-phase 32A. To provide active metering of individual outlets and on/off outlet switching to enable energy optimization during 10 years.



Constituent materials

Reference product mass	9850 g	including the product, its packaging, additional elements and accessories
------------------------	--------	---

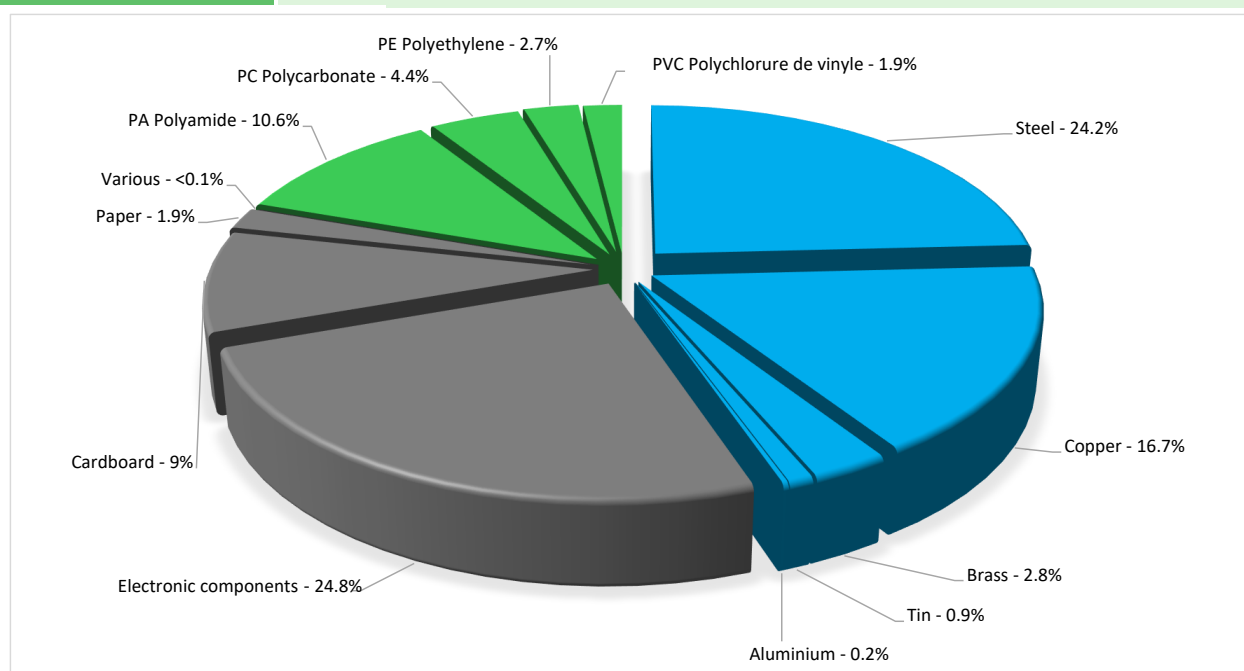

Plastics	19.6%
Metals	44.8%
Others	35.6%



Substance assessment

RoHS compliance	Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) on restriction of lead, mercury, cadmium, hexavalent chromium or flame retardants -PBB&PBDE or phthalates-DEHP, BBP, DBP, DIBP.
REACH compliance	Products of this range are designed in conformity with the requirements of the REACH 1907/2006 regulation and its latest updates.
Battery Directive compliance	The battery within this product range are designed in conformity with the requirements of the Battery and Accumulator Directive (European Directive 2006/66/EC of 26 September 2006).

Details of ROHS and REACH substances information are available on the Schneider-Electric website

<https://www.se.com>



Additional environmental information

End Of Life	Recyclability potential:	52%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--



Environmental impacts

Reference service life time	10 years		
Product category	Combinations of functions		
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study		
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption		
Installation elements	This product does not require any installation operations.		
Use scenario	The product is in 50% load mode 100% of the time with a power use of 56.91W for 10 years.		
Time representativeness	The collected data are representative of the year 2025		
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.		
Geographical representativeness	Final assembly site	Use phase	
	China	Europe	
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Low voltage; 2020; China, CN	No energy used	Electricity Mix; Low voltage; 2020; Europe, EU-27
			[C1 - C4]
			Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

The calculation result is scientific counting method. For example, $1.37\text{E}+06=1.37 \times 10^6=1370000$, $1.64\text{E}-04=1.64 \times 10^{-4}=0.000164$

Mandatory Indicators		Easy PDU,2G, Metered-by-Outlet with Switching, ZeroU, 22kW, 230V, (18) C13 & (6) C19 - EPDU2232SMB0						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	2.13E+03	9.33E+01	1.28E+00	2.92E+00	2.02E+03	1.76E+01	-1.44E+01
Contribution to climate change-fossil	kg CO2 eq	2.09E+03	9.47E+01	1.28E+00	1.57E+00	1.97E+03	1.76E+01	-1.53E+01
Contribution to climate change-biogenic	kg CO2 eq	4.44E+01	0*	0*	1.35E+00	4.45E+01	2.61E-02	8.55E-01
Contribution to climate change-land use and land use change	kg CO2 eq	7.99E-04	7.97E-04	0*	0*	0*	2.18E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.02E-05	1.13E-05	0*	1.60E-08	8.63E-06	2.29E-07	-2.96E-06
Contribution to acidification	mol H+ eq	1.18E+01	1.17E+00	8.28E-03	3.85E-03	1.05E+01	4.16E-02	-3.37E-01
Contribution to eutrophication, freshwater	kg P eq	5.70E-03	7.75E-04	0*	2.81E-05	4.83E-03	6.76E-05	-4.80E-05
Contribution to eutrophication, marine	kg N eq	1.38E+00	1.35E-01	3.89E-03	1.59E-03	1.23E+00	9.78E-03	-1.19E-02
Contribution to eutrophication, terrestrial	mol N eq	2.14E+01	1.47E+00	4.27E-02	1.18E-02	1.98E+01	1.08E-01	-1.33E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	4.40E+00	4.43E-01	1.08E-02	2.68E-03	3.91E+00	2.86E-02	-5.96E-02
Contribution to resource use, minerals and metals	kg Sb eq	6.09E-02	6.02E-02	0*	0*	6.53E-04	0*	-5.67E-03
Contribution to resource use, fossils	MJ	5.02E+04	1.77E+03	1.79E+01	1.26E+01	4.83E+04	1.12E+02	-3.14E+02
Contribution to water use	m3 eq	2.21E+02	6.62E+01	0*	1.43E-01	1.53E+02	1.47E+00	-1.82E+01

Additional indicators for the French regulation are available as well

Inventory flows Indicators		Easy PDU,2G, Metered-by-Outlet with Switching, ZeroU, 22kW, 230V, (18) C13 & (6) C19 - EPDU2232SMB0						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	1.14E+04	8.45E+01	0*	1.83E+00	1.13E+04	6.29E+00	-5.37E+00
Contribution to renewable primary energy used as raw material	MJ	2.10E+01	2.10E+01	0*	0*	0*	0*	-1.55E+01
Contribution to total renewable primary energy	MJ	1.14E+04	1.05E+02	0*	1.83E+00	1.13E+04	6.29E+00	-2.09E+01
Contribution to non renewable primary energy used as energy	MJ	5.01E+04	1.67E+03	1.79E+01	1.26E+01	4.83E+04	1.12E+02	-3.09E+02
Contribution to non renewable primary energy used as raw material	MJ	9.78E+01	9.78E+01	0*	0*	0*	0*	-5.15E+00
Contribution to total non renewable primary energy	MJ	5.02E+04	1.77E+03	1.79E+01	1.26E+01	4.83E+04	1.12E+02	-3.14E+02
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m³	5.16E+00	1.54E+00	0*	8.66E-03	3.57E+00	4.12E-02	-4.24E-01
Contribution to hazardous waste disposed	kg	8.93E+02	8.34E+02	0*	0*	5.56E+01	2.40E+00	-4.42E+02
Contribution to non hazardous waste disposed	kg	3.42E+02	3.09E+01	4.52E-02	7.03E-01	3.04E+02	6.76E+00	-9.15E+00
Contribution to radioactive waste disposed	kg	8.35E-02	1.13E-02	3.22E-05	8.34E-05	7.16E-02	4.39E-04	-4.45E-03
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	5.41E+00	1.27E-01	0*	9.71E-01	0*	4.31E+00	0.00E+00
Contribution to materials for energy recovery	kg	3.76E-10	3.76E-10	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	8.91E-02	1.23E-03	0*	4.59E-02	0*	4.21E-02	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg of C	3.12E-01

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		Easy PDU,2G, Metered-by-Outlet with Switching, ZeroU, 22kW, 230V, (18) C13 & (6) C19 - EPDU2232SMBO							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	2.02E+03	0*	0*	0*	0*	0*	2.02E+03	0*
Contribution to climate change-fossil	kg CO2 eq	1.97E+03	0*	0*	0*	0*	0*	1.97E+03	0*
Contribution to climate change-biogenic	kg CO2 eq	4.45E+01	0*	0*	0*	0*	0*	4.45E+01	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	8.63E-06	0*	0*	0*	0*	0*	8.63E-06	0*
Contribution to acidification	mol H+ eq	1.05E+01	0*	0*	0*	0*	0*	1.05E+01	0*
Contribution to eutrophication, freshwater	kg P eq	4.83E-03	0*	0*	0*	0*	0*	4.83E-03	0*
Contribution to eutrophication marine	kg N eq	1.23E+00	0*	0*	0*	0*	0*	1.23E+00	0*
Contribution to eutrophication, terrestrial	mol N eq	1.98E+01	0*	0*	0*	0*	0*	1.98E+01	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.91E+00	0*	0*	0*	0*	0*	3.91E+00	0*
Contribution to resource use, minerals and metals	kg Sb eq	6.53E-04	0*	0*	0*	0*	0*	6.53E-04	0*
Contribution to resource use, fossils	MJ	4.83E+04	0*	0*	0*	0*	0*	4.83E+04	0*
Contribution to water use	m3 eq	1.53E+02	0*	0*	0*	0*	0*	1.53E+02	0*

Inventory flows Indicators		Easy PDU,2G, Metered-by-Outlet with Switching, ZeroU, 22kW, 230V, (18) C13 & (6) C19 - EPDU2232SMBO							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.13E+04	0*	0*	0*	0*	0*	1.13E+04	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	1.13E+04	0*	0*	0*	0*	0*	1.13E+04	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.83E+04	0*	0*	0*	0*	0*	4.83E+04	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	4.83E+04	0*	0*	0*	0*	0*	4.83E+04	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	3.57E+00	0*	0*	0*	0*	0*	3.57E+00	0*
Contribution to hazardous waste disposed	kg	5.56E+01	0*	0*	0*	0*	0*	5.56E+01	0*
Contribution to non hazardous waste disposed	kg	3.04E+02	0*	0*	0*	0*	0*	3.04E+02	0*
Contribution to radioactive waste disposed	kg	7.16E-02	0*	0*	0*	0*	0*	7.16E-02	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.4, database version 2025-04 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2309051_V2	Drafting rules Supplemented by Information and reference Validity period	PEP-PCR-ed4-2021 09 06 PSR-0005-ed3.1-EN-2023 12 08 www.pep-ecopassport.org 5 years
Date of issue	07-2025		
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
Head Office
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVPEP2309051_V2

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

07/2025