





Przewód AS-i, profilowany do zewnętrznego napięcia pomocniczego 24 V czarny, TPE, olejoodporny, 2 x 1,5 mm², 1 km, na bębnie składa się z 1000 m przewodu

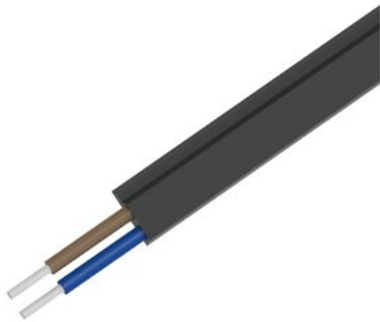

Ogólne dane techniczne					
wykonanie produktu	Profilowane przewody AS-Interface				
Dane mechaniczne					
Promień zgięcia					
• w przypadku przewodu ułożonego na stałe minimalnie dozwolony	12 mm				
• w przypadku ruchomego przewodu minimalnie dozwolony	24 mm				
Aprobata/ Certyfikaty					
General Product Approval	other	Environment			
 EG-Konf.	Confirmation	 RCM		Confirmation	Environmental Confirmations

Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania
Information- and Downloadcenter https://www.siemens.com/ic10
Industry Mall (System zamawiania online) https://mall.industry.siemens.com/mall/pl/pl/Catalog/product?mlfb=3RX9024-0AA00
CAX-Online-Generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9024-0AA00
Service&Support https://support.industry.siemens.com/cs/ww/en/ps/3RX9024-0AA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9024-0AA00&lang=en

Ostatnia zmiana:

23.12.2020 