



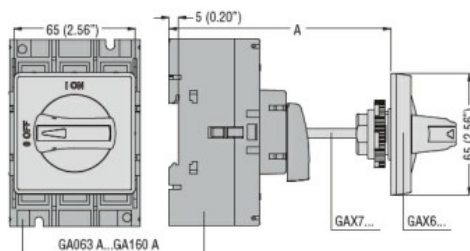



## Wymiary

Shaft extensions for door coupling handles  
**GAX7...**

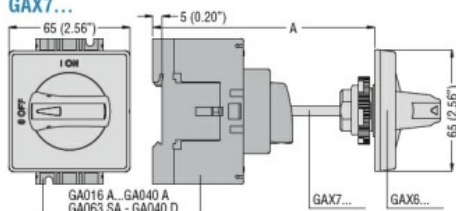

| Extension | Length<br>[mm<br>(in)] | A [mm (in)] maximum |                 |                 |                 |                 |                   |
|-----------|------------------------|---------------------|-----------------|-----------------|-----------------|-----------------|-------------------|
|           |                        | Type of handle      |                 |                 |                 |                 |                   |
|           |                        | GAX61...            | GAX62...        | GAX63...        | GAX64...        | GAX67 B         | GAX68...          |
| GAX7055   | 55<br>(2.16")          | 99<br>(3.90")       | 97<br>(3.82")   | 102<br>(4.01")  | 116<br>(4.57")  | 97<br>(3.82")   | 98.5<br>(3.88")   |
| GAX7070   | 70<br>(2.75")          | 114<br>(4.49")      | 112<br>(4.41")  | 117<br>(4.61")  | 131<br>(5.16")  | 112<br>(4.41")  | 113.5<br>(4.47")  |
| GAX7090   | 90<br>(3.54")          | 134<br>(5.27")      | 132<br>(5.20")  | 137<br>(5.39")  | 151<br>(5.94")  | 132<br>(5.20")  | 133.5<br>(5.25")  |
| GAX7150   | 150<br>(5.90")         | 194<br>(7.64")      | 192<br>(7.56")  | 197<br>(7.75")  | 211<br>(8.31")  | 192<br>(7.56")  | 193.5<br>(7.62")  |
| GAX7200   | 200<br>(7.87")         | 244<br>(9.61")      | 242<br>(9.53")  | 247<br>(9.72")  | 261<br>(10.27") | 242<br>(9.53")  | 243.5<br>(9.59")  |
| GAX7300   | 300<br>(11.81")        | 344<br>(13.54")     | 342<br>(13.46") | 347<br>(13.66") | 361<br>(14.21") | 342<br>(13.46") | 343.5<br>(13.52") |
| GAX7400   | 400<br>(15.75")        | 444<br>(17.48")     | 442<br>(17.40") | 447<br>(17.60") | 461<br>(18.15") | 442<br>(17.40") | 443.5<br>(17.46") |
| GAX7500   | 500<br>(19.68")        | 544<br>(21.42")     | 542<br>(21.34") | 547<br>(21.53") | 561<br>(22.09") | 542<br>(21.34") | 543.5<br>(21.40") |

**GAX7...** used with GAX50 00, GAX50 01 and GAX60 00

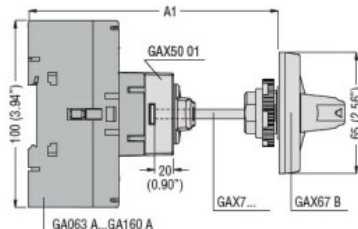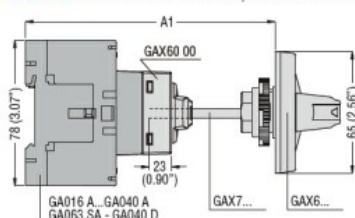

| Extension | Length<br>[mm<br>(in)] | A1 [mm (in)] maximum |                 |                 |                 |                   |                 |
|-----------|------------------------|----------------------|-----------------|-----------------|-----------------|-------------------|-----------------|
|           |                        | Used with GAX60 00   |                 |                 |                 |                   |                 |
|           |                        | Type of handle       |                 |                 |                 |                   |                 |
|           |                        | GAX61...             | GAX62...        | GAX63...        | GAX64...        | GAX68...          | GAX67 B         |
|           |                        | GAX61...             | GAX62...        | GAX63...        | GAX64...        | GAX68...          | GAX67 B         |
| GAX7055   | 55<br>(2.16")          | 116<br>(4.57")       | 114<br>(4.49")  | 119<br>(4.68")  | 133<br>(5.24")  | 115.5<br>(4.55")  | 114<br>(4.49")  |
| GAX7070   | 70<br>(2.75")          | 131<br>(5.16")       | 129<br>(5.08")  | 134<br>(5.27")  | 148<br>(5.83")  | 130.5<br>(5.14")  | 129<br>(5.08")  |
| GAX7090   | 90<br>(3.54")          | 151<br>(5.94")       | 149<br>(5.87")  | 154<br>(6.06")  | 168<br>(6.61")  | 150.5<br>(5.92")  | 149<br>(5.87")  |
| GAX7150   | 150<br>(5.90")         | 211<br>(8.31")       | 209<br>(8.23")  | 214<br>(8.42")  | 228<br>(8.98")  | 210.5<br>(8.29")  | 209<br>(8.23")  |
| GAX7200   | 200<br>(7.87")         | 261<br>(10.27")      | 259<br>(10.20") | 264<br>(10.39") | 278<br>(10.94") | 260.5<br>(10.25") | 259<br>(10.20") |
| GAX7300   | 300<br>(11.81")        | 361<br>(14.21")      | 359<br>(14.13") | 364<br>(14.33") | 378<br>(14.88") | 360.5<br>(14.20") | 359<br>(14.13") |
| GAX7400   | 400<br>(15.75")        | 461<br>(18.15")      | 459<br>(18.07") | 464<br>(18.27") | 468<br>(18.42") | 460.5<br>(18.13") | 459<br>(18.07") |
| GAX7500   | 500<br>(19.68")        | 561<br>(22.09")      | 559<br>(22.01") | 564<br>(22.20") | 578<br>(22.75") | 560.5<br>(22.07") | 559<br>(22.01") |

## Certyfikaty i zgodność

### Zgodność

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

### Certyfikaty

CSA C22.2 n°4

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

cULus according to UL98

EAC

## Klasyfikacja ETIM

ETIM 8,0

EC002498 -  
Akcesoria/części  
zamienne do  
aparatury  
niskonapięciowej