


SETRON, uchwyt bezpiecznika cylindrycznego, 22x58 mm, 3 fazy+N, In: 100 A, Un AC: 690 V, sygnalizator LED



Wersja		
Nazwa markowa produktu		SETRON
oznaczenie produktu		Uchwyt bezpiecznika cylindrycznego
wykonanie produktu		Sygnalizator LED
Ogólne dane techniczne		
liczba biegunów		4
wersja biegunów		3 faz. + N
wielkość wkładki bezpiecznikowej		22x58 mm
Napięcie zasilania		
napięcie robocze		690 V
• przy AC wartość znamionowa		
Stopień ochrony IP		IP20
Konstrukcja mechaniczna		
wysokość		117 mm
szerokość		144 mm
głębokość		70 mm
Waga netto na jedn.		732 g
Certyfikaty		
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009		F
Zezwolenia Certyfikaty		
Environment	General Product Approval	Test Certificates

[Environmental Con-
firmations](#)

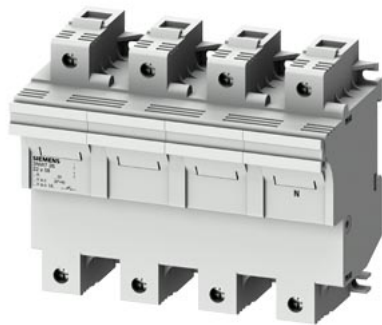

[Confirmation](#)

[Miscellaneous](#)

other

[Confirmation](#)



Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012 Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7262>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NW7262>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7262

CAX-Online-Generator


<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

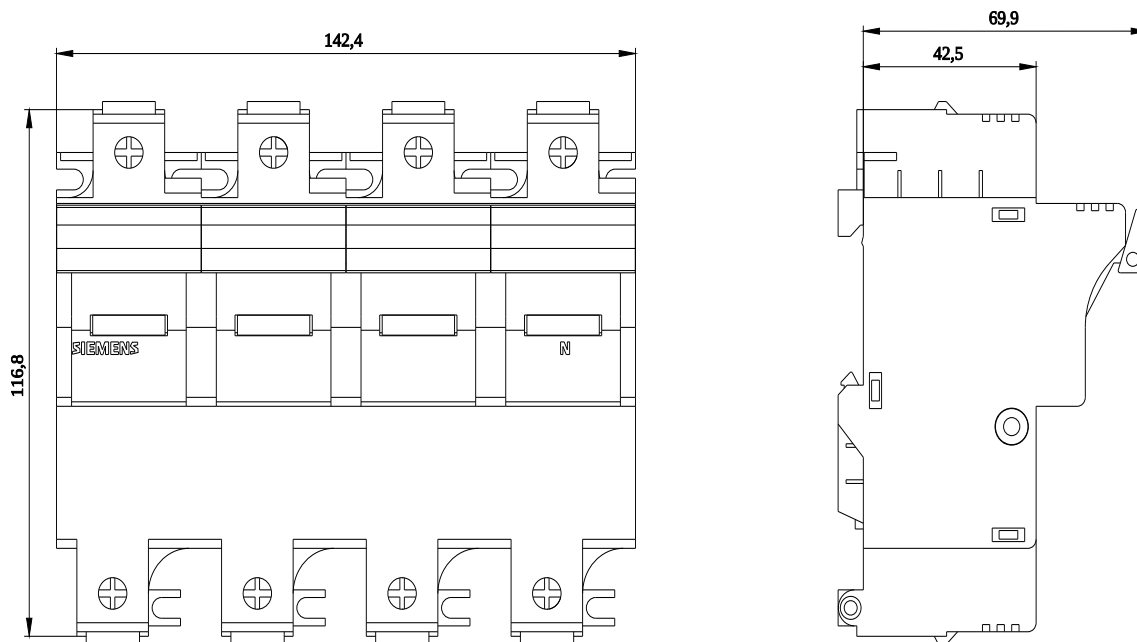

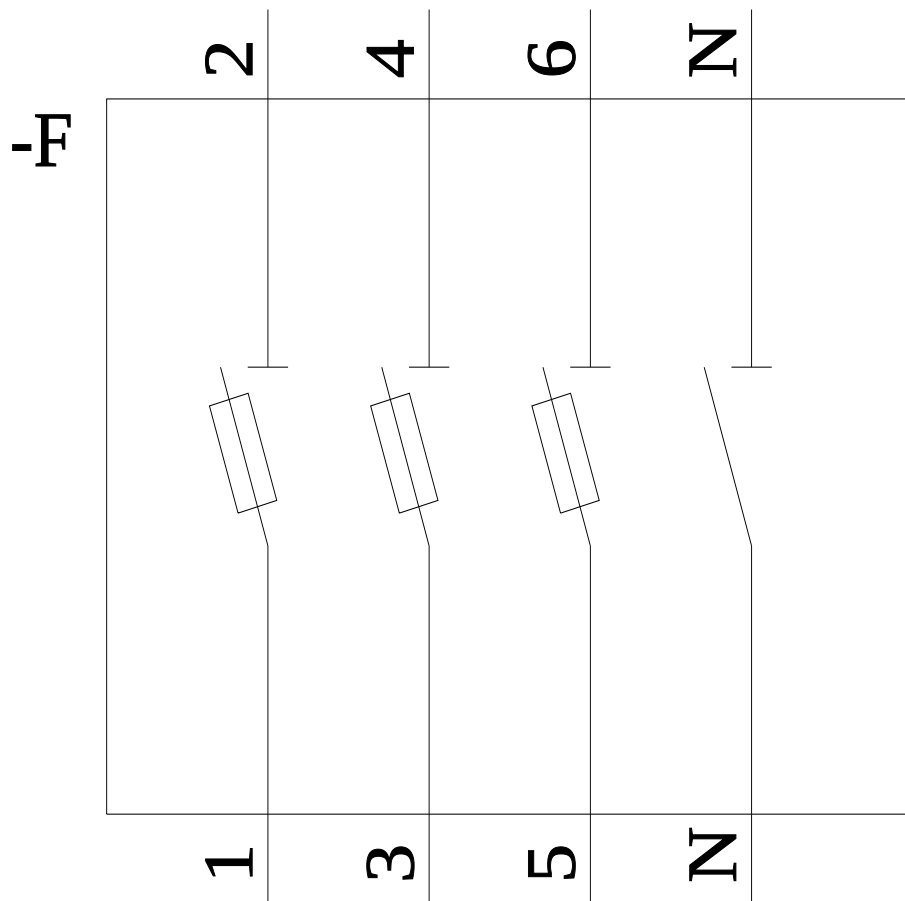

Ostatnia zmiana:

11.04.2025 

