



Figure similar

SETRON, uchwyt bezpiecznika cylindrycznego, 10x38 mm, 2-bieg., In: 30 A, Ue DC: 1000 V, do zastosowań w fotowoltaice

Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Uchwyt bezpiecznika cylindrycznego
wykonanie produktu	do zastosowań fotowoltaicznych
Ogólne dane techniczne	
liczba biegunów	2
wielkość wkładki bezpiecznikowej	10 x 38 mm
Napięcie zasilania	
napięcie robocze	1 000 V
• przy DC wartość znamionowa	
Stopień ochrony IP	IP20
Konstrukcja mechaniczna	
wysokość	85 mm
szerokość	36 mm
głębokość	65 mm
Waga netto na jedn.	101 g
Certyfikaty	
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	F
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)



[Confirmation](#)

General Product Approval	other
	
	

[Miscellaneous](#)

[Confirmation](#)

Więcej informacji

Informacje dotyczące opakowania
[Informacje dotyczące opakowania](#)
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7023-4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NW7023-4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7023-4

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

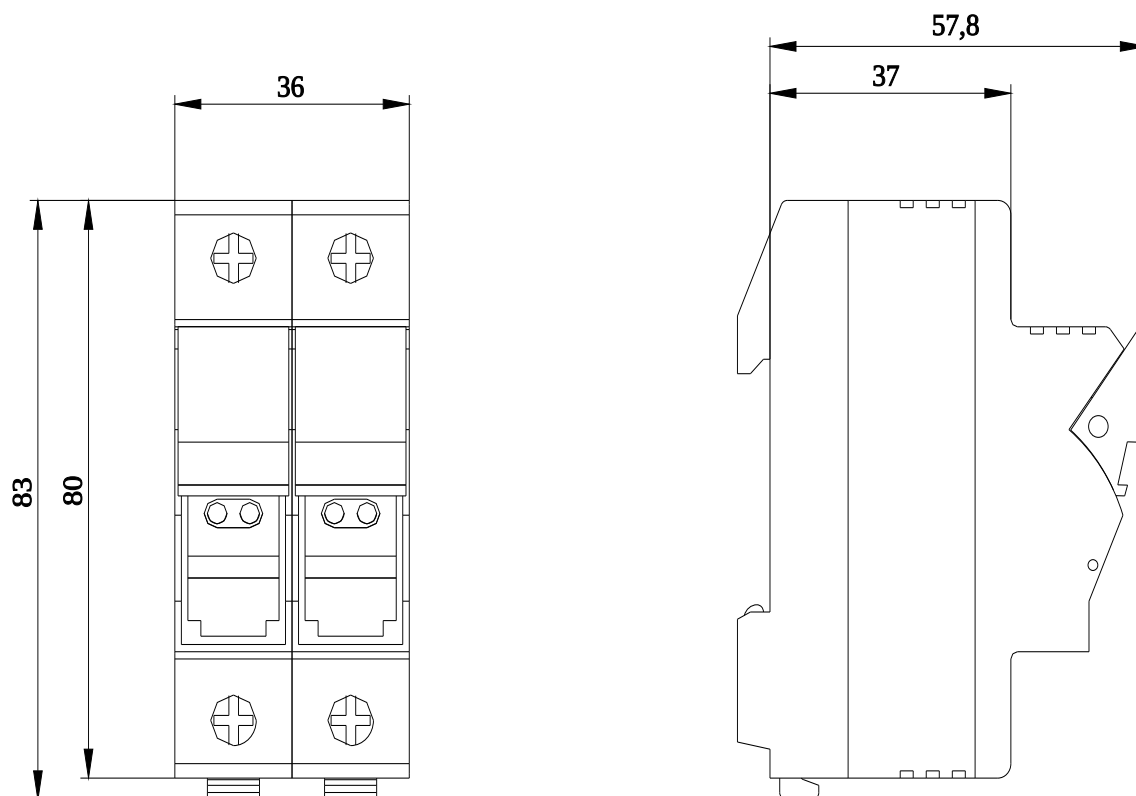

Ostatnia zmiana:

11.04.2025

