

SETRON, uchwyt bezpiecznika cylindrycznego, 14x51 mm, 3 fazy+N, In: 50 A, Un AC: 690 V, sygnalizator LED



Wersja	
Nazwa markowa produktu	SETRON
oznaczenie produktu	Uchwyt bezpiecznika cylindrycznego
wykonanie produktu	Sygnalizator LED
Ogólne dane techniczne	
liczba biegunów	4
wersja biegunów	3 faz. + N
wielkość wkładki bezpiecznikowej	14x51 mm
Napięcie zasilania	
napięcie robocze	690 V
• przy AC wartość znamionowa	
Stopień ochrony IP	IP20
Konstrukcja mechaniczna	
wysokość	90 mm
szerokość	108 mm
głębokość	70 mm
Waga netto na jedn.	470 g
Certyfikaty	
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	F
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Con-
firmations](#)



[Confirmation](#)



Test Certificates	other
-------------------	-------

[Miscellaneous](#)

[Confirmation](#)



Więcej informacji
Informacje dotyczące opakowania Informacje dotyczące opakowania
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7162>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NW7162>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7162

CAX-Online-Generator


<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

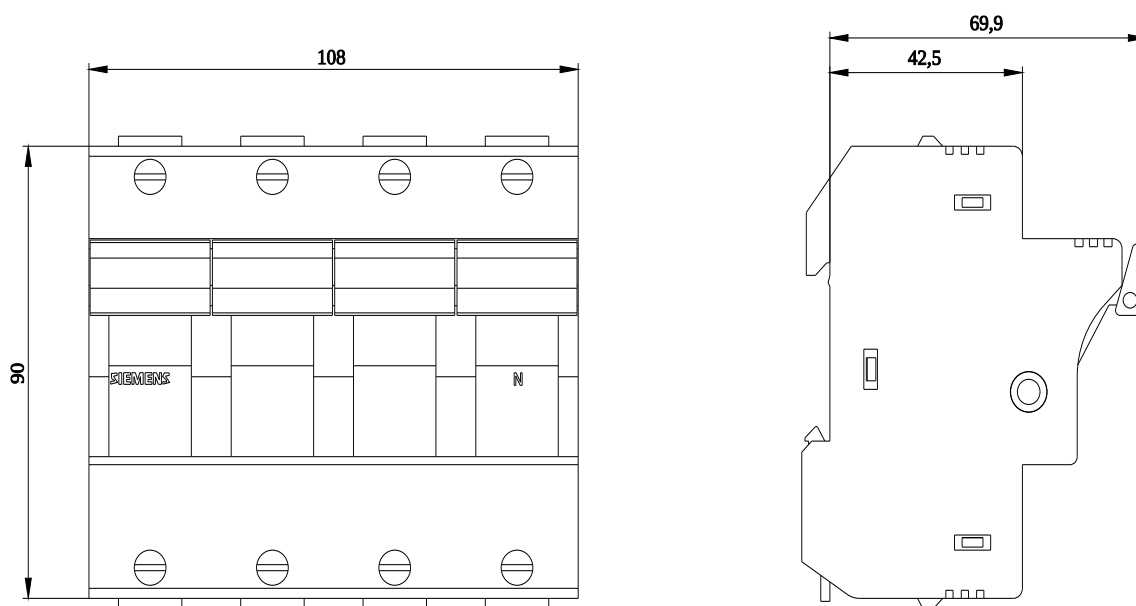

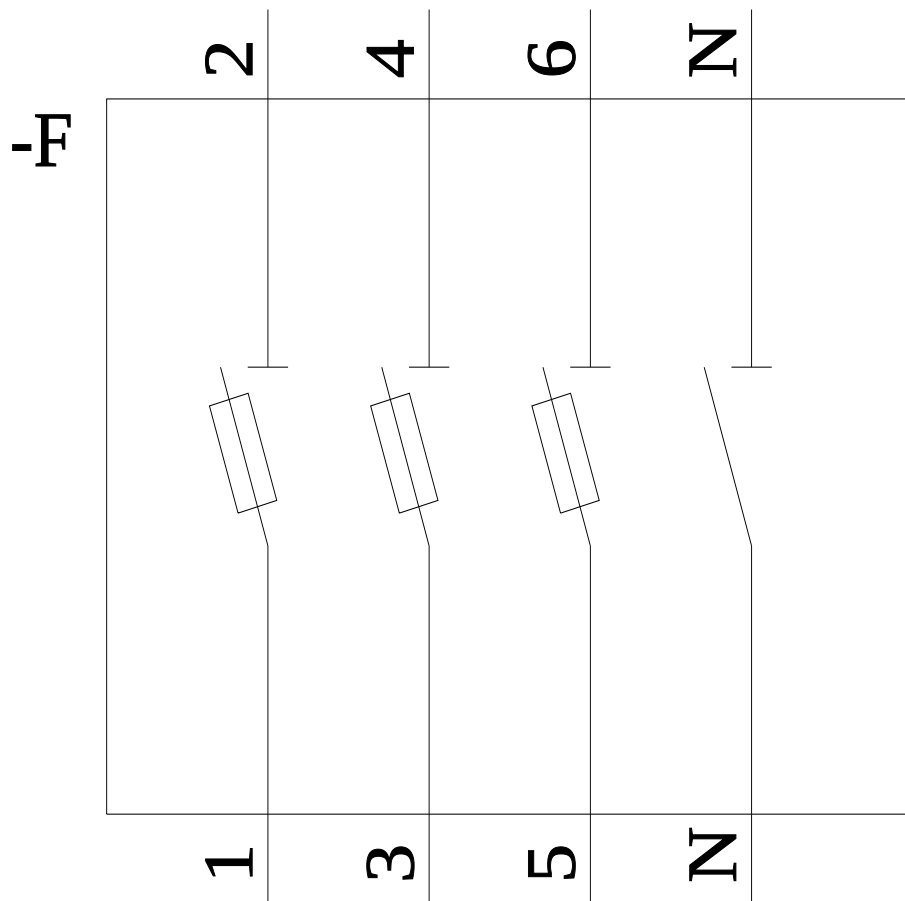

Ostatnia zmiana:

11.04.2025 

