



SENTRON, uchwyt bezpiecznika cylindrycznego, 10x38 mm, 3-bieg., In: 32 A, Un AC: 690 V, do systemu szyn zbiorczych 8US 60 mm

Wersja	
Nazwa markowa produktu	SENTRON
oznaczenie produktu	Uchwyt bezpiecznika cylindrycznego
wykonanie produktu	do układu szyn zbiorczych 8US 60 mm
Ogólne dane techniczne	
liczba biegunów	3
wielkość wkładki bezpiecznikowej	10 x 38 mm
Napięcie zasilania	
napięcie robocze	690 V
• przy AC wartość znamionowa	
Stopień ochrony IP	IP20
Konstrukcja mechaniczna	
wysokość	200 mm
szerokość	27 mm
głębokość	79 mm
Waga netto na jedn.	231 g
Certyfikaty	
oznaczenie środków roboczych zgodnie z IEC 81346-2:2009	F
Zezwolenia Certyfikaty	
Environment	General Product Approval

[Environmental Conformations](#)



[Confirmation](#)



other

[Confirmation](#)



Więcej informacji
Informacje dotyczące opakowania
Informacje dotyczące opakowania
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...)
https://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW7431>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NW7431>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7431

CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications


<https://www.siemens.com/specifications>

Krzywe charakterystyczne

https://curves.simar.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>



-F

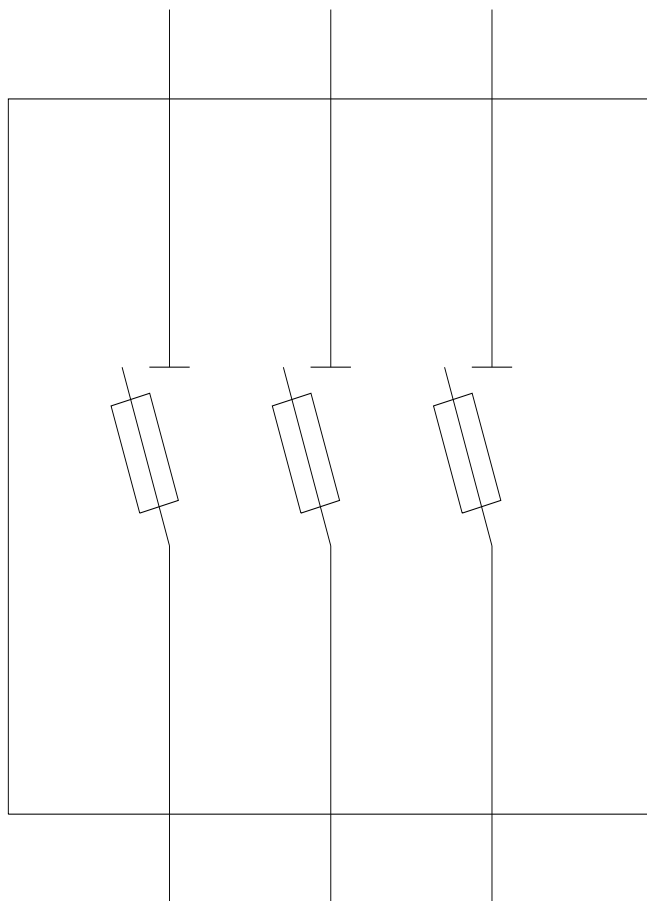

Ostatnia zmiana:

11.04.2025 

