



rozłącznik nożowy NH rozm. 0 zwora izolowana

Wersja	
Nazwa markowa produktu	SENTRON
oznaczenie produktu	Wyposażenie NH
wykonanie produktu	Rozłącznik nożowy NH
wielkość wkładki bezpiecznikowej	NH0
Obwód główny	
prąd roboczy wartość znamionowa	160 A
Konstrukcja mechaniczna	
wysokość	125 mm
głębokość	48 mm
masa netto	121 g
Zezwolenia Certyfikaty	
General Product Approval	other



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

### Environment

[Environmental Confirmations](#)

### Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NG1102>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NG1102>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NG1102](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NG1102)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

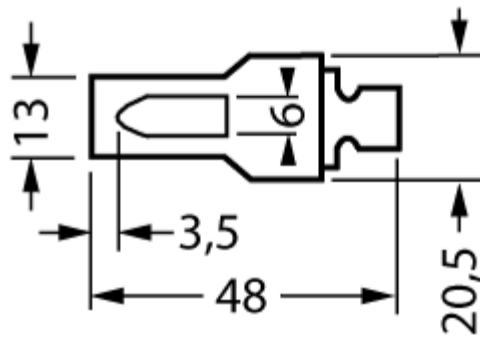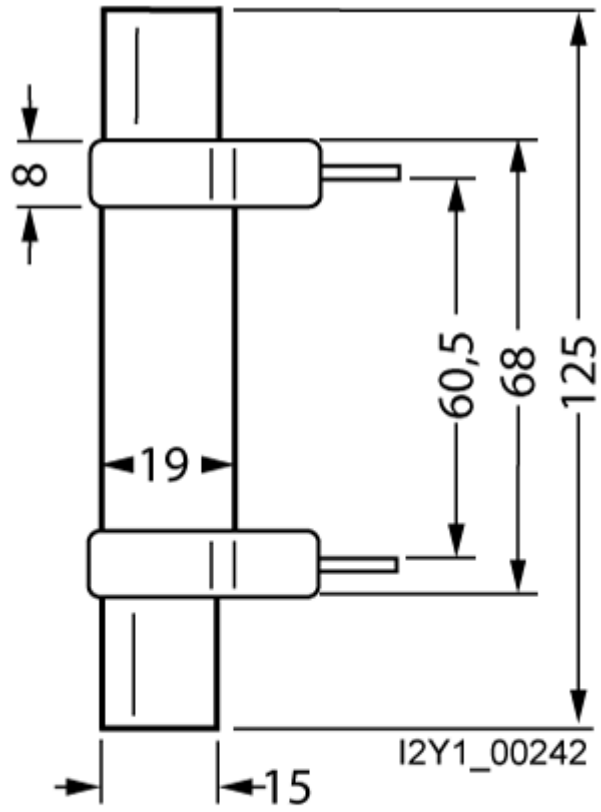

Ostatnia zmiana:

22.01.2025 

