



rozłącznik nożowy NH rozm. 4 A

| Wersja                           |                      |
|----------------------------------|----------------------|
| Nazwa markowa produktu           | SETRON               |
| oznaczenie produktu              | Wyposażenie NH       |
| wykonanie produktu               | Rozłącznik nożowy NH |
| wielkość wkładki bezpiecznikowej | NH4a                 |
| Obwód główny                     |                      |
| prąd roboczy wartość znamionowa  | 1 250 A              |
| Konstrukcja mechaniczna          |                      |
| wysokość                         | 197 mm               |
| głębokość                        | 105 mm               |
| masa netto                       | 721 g                |
| Zezwolenia Certyfikaty           |                      |
| General Product Approval         | other                |



[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

### Environment

[Environmental Con-  
firmations](#)

### Więcej informacji

Informacje dotyczące opakowania

[Informacje dotyczące opakowania](#)

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NG1505>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/pl/ps/3NG1505>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NG1505](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NG1505)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

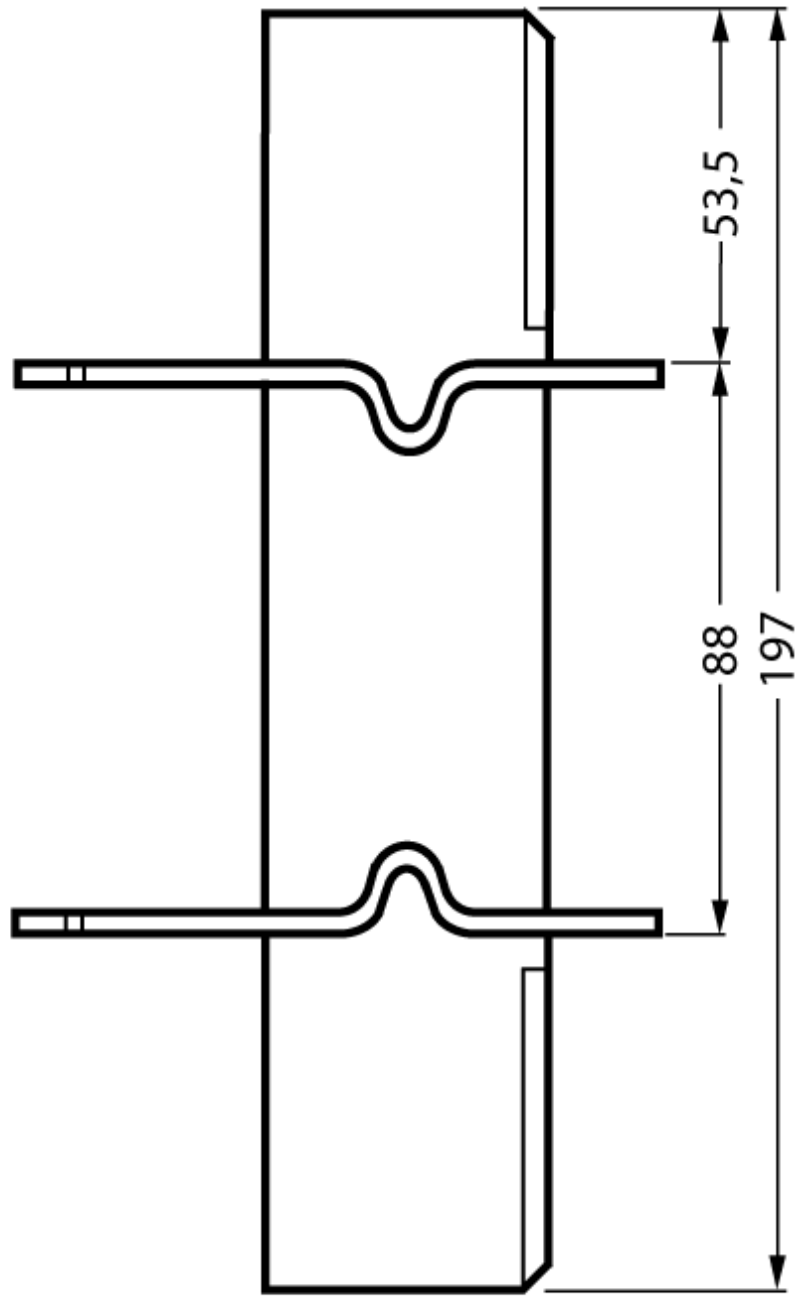

I2Y1\_00247

