

Bracket Standard White Series

B-W/B Series

Joiner Standard White Series


J-W Series



Dimensions and applications

T type bracket set

- Model No.: B110-W / B310-W / B410-W / B810-W
- Applications

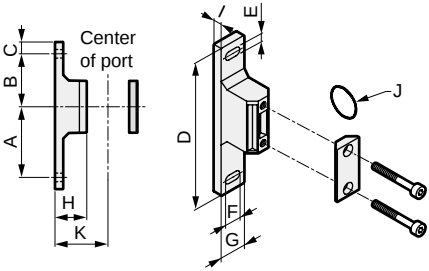

· Material: Polyamide resin (B110-W)
Aluminum alloy die-casting (B310 to B810-W)
Painting (B310 to B810-W)




Note: Select B410-W when using the 3000-W Series and 4000-W Series combined.

Model No.	Compatible model	A	B	C	D	E	F	G	H	I	J	K	Wt. (kg)
B110-W	1000 Series	45	35	10	100	5.5	7.5	16	25	7.5	JASO-2013	40	0.024
B310-W	2000 Series	60	45	10	125	7	14	22	27	7	JISB2401-P21	45	0.086
	3000 Series												
B410-W	4000 Series	60	45	10	125	7	14	22	37	7	JISB2401-P21	55	0.094
B810-W	6000 Series	70	50	15	150	9	14	27	37	8	AS568-127	65	0.169
	8000 Series												

C type bracket

- Model No.: B120/B220/B320/B420/B620/B820
- Attachment: BW



· Material: Steel
Zinc plated

- Applications




Model No.	Compatible model	A	B	C	D	E	F	G	H	I	J	K	L	Wt. (kg)
B120	1000 Series	44	68	40	t2.0	10	6.5	35	8.5	61.5	40	60	ø19.5	0.1
B220	2000 Series	28	54	50	t2.3	10	7	33	8	63	45	69	17.3	0.15
B320	3000 Series	34.5	67	63	t2.3	16.5	7	45	8.5	75.5	45	69	ø21.7	0.17
B420	4000 Series	55	84	80	t2.3	14.0	7	45	8.5	75.5	55	79	ø21.7	0.21
B620	6000 Series	68	104	90	t2.3	16	9	54	11	97.5	60	97	ø35	0.34
B820	8000 Series	68	104	100	t2.3	16	9	50	11	93.5	65	102	ø35	0.36

L type bracket

- Model No.: B130/B230/B330/B430
- Attachment: B3W

Loosen the mounting nut to remove the knob. After inserting the L type bracket, fix it by the mounting nut. Press the knob in manually after fixing.
Refer to page 357 for details.



· Material: Steel
Zinc plated


- Applications



Model No.	Compatible model	A	B	C	D	E	F	G	H	I	J	Others	Wt. (kg)
B130	1000 Series	44	68	10	6.5	16	24.5	45	40	59	ø26.5		0.04
B230	2000 Series	28	54	10	7	18	26	52	45	69	38		0.06
B330	3000 Series	34.5	67	16.5	7	17.5	26	58 (63.5)	45	76	ø40	Values in () are for W3000/3100	0.07
B430	4000 Series 6000 Series	55	84	14	7	17.5	26	58	55	94	ø47		0.11

Joiner set

- Model No.: C1000-J100-W
C4000-J400-W
C8000-J800-W




· Material: Polyamide resin (J100-W)
Aluminum alloy die-casting (J400 to J800-W)
Painting (J400, J800-W)

- Applications



Model No.	Compatible model	A	B	C	D	E	Weight (kg)	
C1000-J100-W	1000 Series	10	36	26	M3.5	JASO-2013	0.011	
C4000-J400-W	2000 Series	21	44	32	M5	JIS B2401-P21	0.036	
	3000 Series							
	4000 Series							
C8000-J800-W	6000 Series 8000 Series	26	65	50	M6	AS568-127	0.094	



Bracket Outdoor Series

BW Series

Joiner Outdoor Series


JW Series

RoHS

CAD


Dimensions

T-bracket set




Model No.	Compatibility	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
BW410-W	4000 Series	60	45	10	125	7	14	22	37	7	JISB2401-P21	55	0.094
BW810-W	8000 Series	70	50	15	150	9	14	27	37	8	AS568-127	65	0.169

Joiner set



Model No.	Compatibility	A	B	C	D	E	Weight (kg)
C4000-JW400-W	4000 Series	21	44	32	M5	JIS B2401-P21	0.036
C8000-JW800-W	8000 Series	26	65	50	M6	AS568-127	0.094



Attached device
Piping adapter

AW400/AW800 Series


Port size: Rc1/4 to Rc1 1/4

RoHS

CAD


Dimensions

Piping adapter set



Model No.	Port size	Compatibility	A	B	C	D	E (O-ring)	F (gasket)	Others
AW400-8-W	Rc 1/4	4000 Series	20 (25) {34}	6 (11) {20}	50	45	JISB2401 P21 1 pc.	1 pc.	Values in () are Rc 3/4 Values in { } are Rc1
AW400-10-W	Rc 3/8								
AW400-15-W	Rc 1/2								
AW400-20-W	Rc 3/4								
AW400-25-W	Rc1								
AW800-20-W	Rc 3/4	8000 Series	35 (38)	15 (18)	81	66	AS568- 127 1 pc.	1 pc.	Values in () are Rc1 1/4
AW800-25-W	Rc1								
AW800-32-W	Rc1 1/4								

Piping adapter set



Model No.	Port size	Compatibility	A	B	C	D	E (O-ring)	F (gasket)	Others
AW400-8-W-B41W	Rc 1/4	4000 Series	20 (25) {34}	6 (11) {20}	50	45	JISB2401 P21 1 pc.	1 pc.	Values in () are Rc 3/4 Values in { } are Rc1
AW400-10-W-B41W	Rc 3/8								
AW400-15-W-B41W	Rc 1/2								
AW400-20-W-B41W	Rc 3/4								
AW400-25-W-B41W	Rc1								
AW800-20-W-B81W	Rc 3/4	8000 Series	35 (38)	15 (18)	81	66	AS568-127 1 pc.	1 pc.	Values in () are Rc1 1/4
AW800-25-W-B81W	Rc1								
AW800-32-W-B81W	Rc1 1/4								

CKD