



stand-alone assembly support for
3RU21/3RB30/3RB31/3RR2 Size S00 Stand-alone
installation Main circuit: Screw Auxiliary circuit: --

General technical data		
product brand name		SIRIUS
product designation		individual mount
size of overload relay		S00
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Installation/ mounting/ dimensions		
fastening method		screw and snap-on mounting onto 35 mm standard mounting rail
width	mm	45
height	mm	89
depth	mm	75
Connections/ Terminals		
type of electrical connection		
• for main current circuit		screw-type terminals
type of connectable conductor cross-sections		
• for main contacts finely stranded — with core end processing		0.5 ... 2.5 mm ²
• at AWG cables for main contacts		1x (20 ... 12)
Certificates/ approvals		
General Product Approval	Declaration of Conformity	Test Certificates



[Confirmation](#)



EG-Konf.

[Special Test Certificate](#)

Test Certificates

Marine / Shipping

[Type Test Certificates/Test Report](#)



ABS



BUREAU
VERITAS



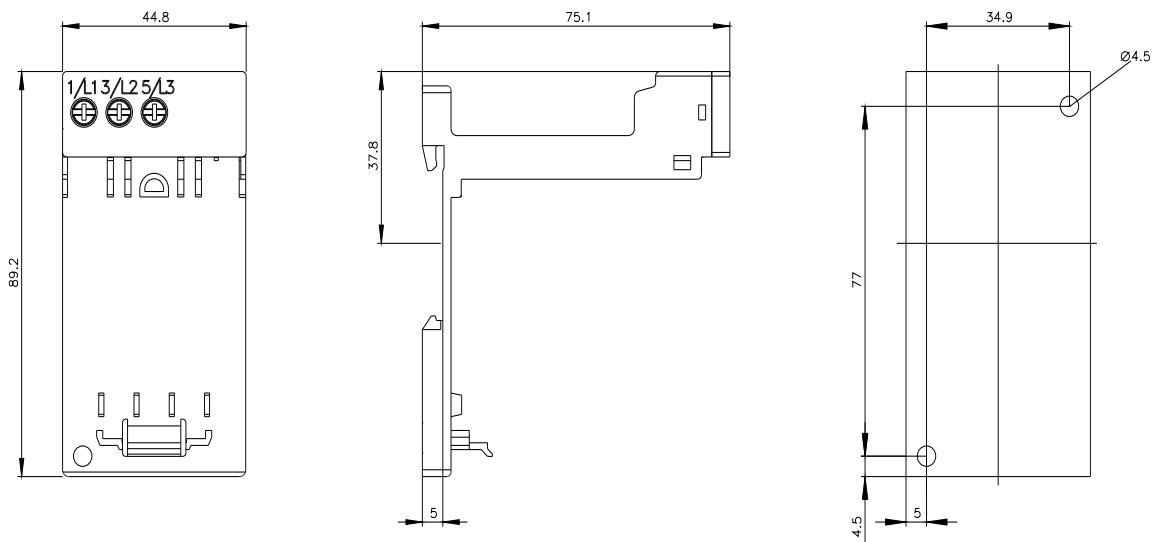
LRS



PRS



RINA

[Confirmation](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2916-3AA01>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2916-3AA01>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3RU2916-3AA01>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2916-3AA01&lang=en

1/L1

3/L2

5/L3

--	--	--	--

last modified:

12/15/2020 