SIEMENS

Data sheet

3SB3000-0AA51



22MM PLASTIC ROUND ACTUATOR: PUSHBUTTON WITH FLAT BUTTON WITH HOLDER BLUE !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor Preferred successor type is >>3SU1000-0AB50-0AA0 + 3SU1500-0AA10-0AA0<<

design of the product			
design of the product	Single device round		
Enclosure			
number of command points	1		
Actuator			
design of the actuating element	Pushbutton		
principle of operation of the actuating element	momentary contact type		
product extension optional light source	No		
color of the actuating element	blue		
material of the actuating element	plastic		
shape of the actuating element	Flat pushbutton		
outer diameter of the actuating element	28.5 mm		
type of unlocking device	without		
number of switching positions	2		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	plastic		
color of the front ring	black		
Holder			
material of the holder	Plastic		
General technical data			
product function			
 EMERGENCY OFF function 	No		
EMERGENCY STOP function	No		
protection class IP	IP66		
vibration resistance according to IEC 60068-2-6	20 200 Hz: 5g		
operating frequency maximum	1 000 1/h		
mechanical service life (operating cycles) typical	10 000 000		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	07/01/2006		
Connections/ Terminals			
tightening torque of the screws in the bracket	1 1.2 N·m		
Ambient conditions			
ambient temperature			
during operation	-25 +70 °C		
during storage	-40 +80 °C		
environmental category during operation according to IEC 60721	3К6		
Installation/ mounting/ dimensions			

fastening method		front	front mounting				
shape of the installati	on opening		round				
mounting diameter		22 mi	22 mm				
mounting height		8 mm	8 mm				
installation width		28.5	28.5 mm				
installation depth		29 mi	29 mm				
ertificates/ approvals							
General Product Approval			Marine / Shipping				
(SP)	U	EHC	Lloydis Register urs	PRS	RINA		
Marine / Shipping	other						
	<u>Confirmation</u>	<u>Miscellaneous</u>					
urther information	to exit the Russian mar	ket (see here)					
https://press.siemens.c Siemens is working o Please contact your loc	om/global/en/pressreleas on the renewal of the cur cal Siemens office on the s	e/siemens-wind-down-russ	C certification if you intend	to import or offer to sup	ply these products to a		
Information on the pa	ckaging		,				
	.siemens.com/cs/ww/en/v						
	nloadcenter (Catalogs,	Brocnures,)					
https://www.siemens.co	om/ic10						

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3000-0AA51

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3000-0AA51

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SB3000-0AA51

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3000-0AA51&lang=en

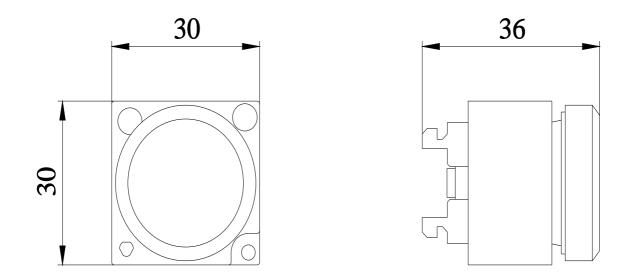

last modified:

1/18/2021 🖸